
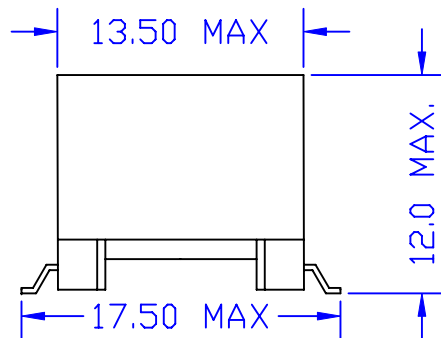
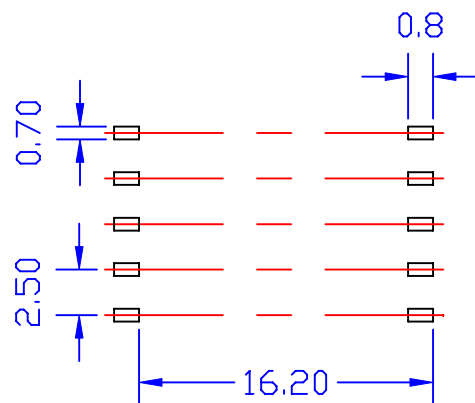
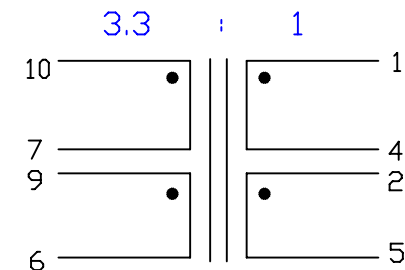
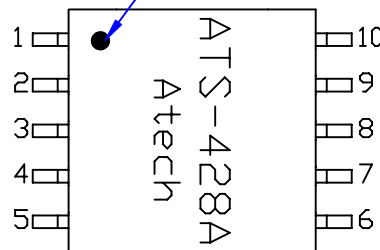


DOT PIN#1

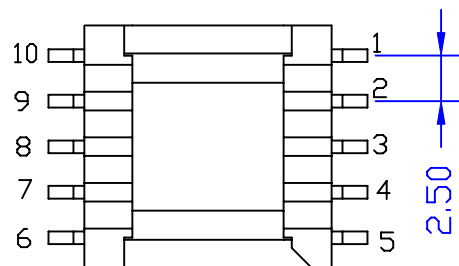

NONE TOLERANCE FOR REFERENCE

ELECTRICAL CHARACTERISTICS : <Meet IEC950/UL1950,36148 COMPATIBLE>

- PIN 1-4 = PIN 2-5 = 0.18 OHM MAX.
PIN 10-7 = PIN 9-6 = 0.774 OHM MAX.
- INDUCTANCE (@10 KHZ , 0.1 Vrms):
PIN 10-6 (7-9 SHORT) = 800 uH ±5%
- LEAKAGE INDUCTANCE (@100 KHZ , 0.1 Vrms):
PIN 10-6 (7-9 , 1-4-2-5 SHORT) = 15 uH MAX.
- INTERWINDING CAP. (@100 KHZ , 0.1 Vrms):
PRI-SEC = 65 PF MAX.
- URNS RATIO (@5 KHZ , 1 Vrms):
PIN 10-7-9-6 : PIN 1-4-2-5 = 3.33 ±1%
- LONGITUDINAL BAL. (@100 KHZ , 0 dBm): 60 dB min.
- HI-POT(@1500 VAC , 1 mA , 1 MIN.):PRI.-SEC.
- LEAD-FREE.

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6867 FAX:(02)2794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO.	
A	DELETED MFG.	07/27/2007	PAIR	WILLIE	EUGENE			ATS-428AN	
	RELEASE	08/02/2004	BART	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						08/02/04			Pair