
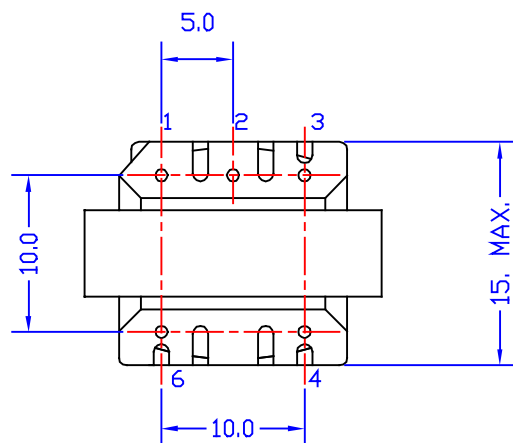



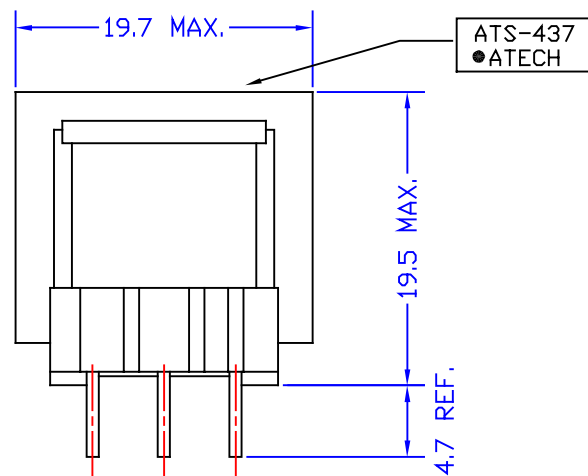

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = PIN 2-3 = 12 Ω HM $\pm$ 12% PIN 4-6 = 34 Ω HM $\pm$ 12%
- INDUCTANCE (@1KHZ , 1Vrms) : PIN 1-3 = 243 mH $\pm$ 10%
- FREQUENCY RESPONSE (@REF 10 KHZ , 1.6Vrms) :
 @300HZ = $\pm$ 1dB
 @75KHZ = $\pm$ 1dB
- POLARITY : PIN 3-2 : PIN 2-1 , PIN 3-1 : PIN 4-6
- HI - POT (@2.5KVAC , 1mA , 1SEC) : PRI - SEC

					Atech®		TITLE
					Atech Technology Co., Ltd.		TRANSFORMER
					TEL:(02)2794-8867 FAX:(02)2794-8004		DWG. NO.
							ATS-437
A	CHANGE THE LOCATION OF PINS	07/10/00	FENG	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	01/24/00	RORY	SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW
REVISIONS					01/24/00		Pair