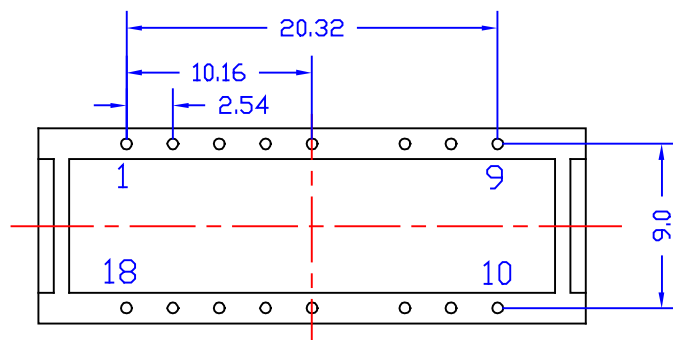
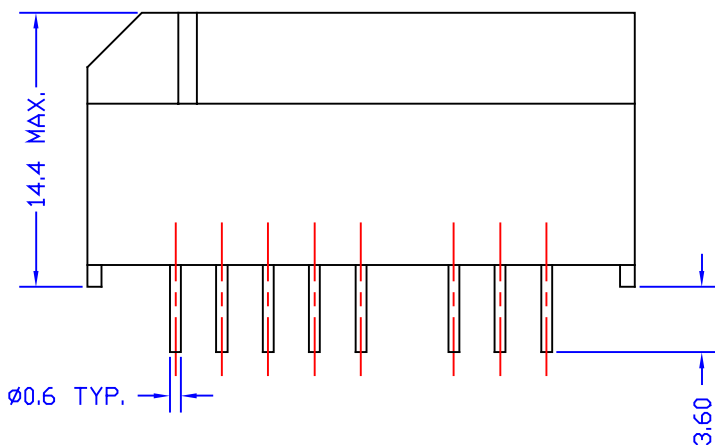
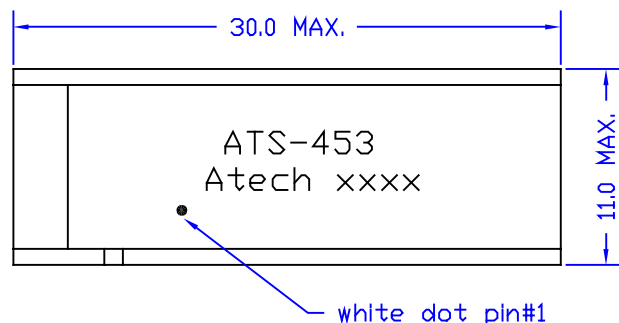


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : 2-17 = 4-15 = 7-9 = 2.5 OHM MAX.
10-12 = 4.5 OHM MAX.
2. INDUCTANCE : (@10KHZ, 0.1Vrms)
2-17 = 4-15 = 30mH MIN.
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms, 9-7,10-12 SHORT)
2-17 = 4-15 = 5uH MAX.
4. INTERWINDING CAP: (@10KHZ, 0.1Vrms)
2-9 = 4-10 = 150pF MAX.
5. TURNS RATIO : (@15KHZ, 0.1Vrms)
9-7 : 2-17 = 1.0+/-1%
10-12 : 4-15 = 2.0+/-1%
6. HI-POT : 2-9, 4-10 (@1500Vrms, 1mA 2SEC.)
3-16 (@500Vrms, 1mA, 2SEC, 2-9, 4-10 SHORT)

						Atech®		TITLE ISDN SO MODULE	
						Atech Technology Co., Ltd.		DWG. NO. ATS-453	
						TELE: (02) 2794-6667 FAX: (02) 2794-8004			
A	DELETE CHOKE	07/20/00	PAIR		SUEDY	UNITS: M/M		SAFETY	
	RELEASE	05/19/00	PAIR		SUEDY			SHEET 1 OF 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE 05/19/00		DRAW Pair	
REVISIONS									