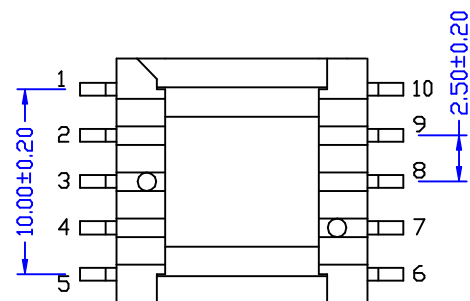


1. TURNS RATIO (@120KHZ, 0.1Vrms) : PIN 2-5 : 10-7 = $2 \pm 1\%$
PIN 2-5 : 9-6 = $2 \pm 1\%$
PIN 2-5 : 1-4 = $1 \pm 1\%$
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (W/H 2-4 SHORT) = $409.5\mu\text{H} \pm 5\%$
3. DCR : PIN 1-4 = 2-5 = 0.684 OHM MAX.
PIN 6-9 = 7-10 = 0.336 OHM MAX.
4. LEAKAGE INDUCTANCE (@300KHZ, 0.1Vrms) :
PIN 1-5 (W/H 2-4 7-9 6-10 SHORT) = $6.5\mu\text{H}$ MAX.
5. L/B (@20KHZ - 1MHZ) = 50dB MIN.
6. HI-POT (@1875VAC, 1mA, 1SEC, W/H 4-2 , 7-9 SHORT) : PIN 1-10
(@625VAC, 1mA, 1SEC) : PIN 1-2

						 Atech[®] Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADJSL TRANSFORMER	
A	TOLERANCE	08/02/2002	DOLLY	JEFF	SUEDY			DWG. NO. AT5-463A	
	RELEASE	10/12/2001	DOLLY	JEFF	SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/12/01		SHEET 1 OF 1	
REVISONS								DRAW <i>Pair</i>	