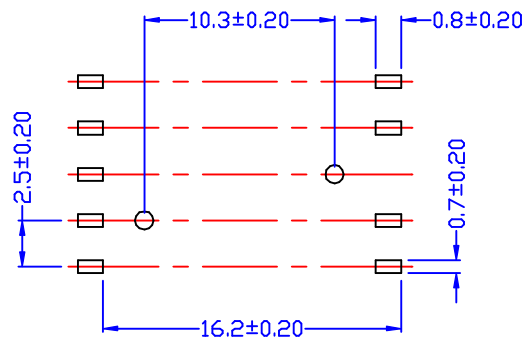
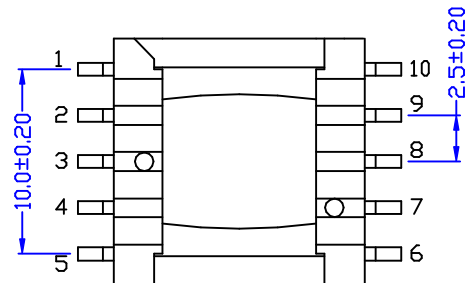
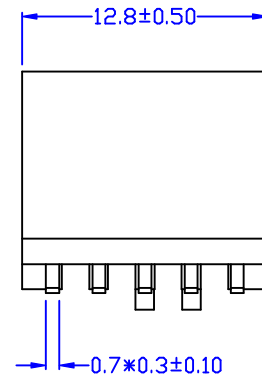
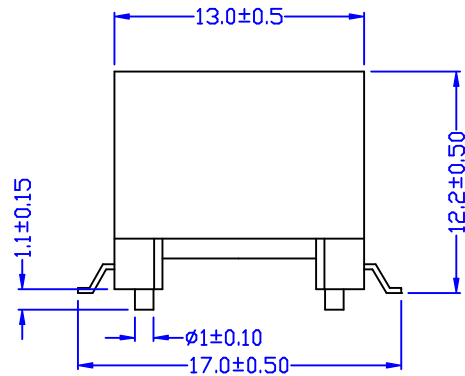
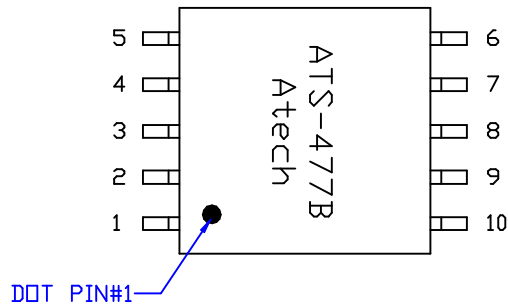


ELECTRICAL CHARACTERISTICS : <AP 1129 COMPATIBLE>

- DCR : PIN 10-7 = 9-6 = 0.228 OHM $\pm$ 12%
PIN 1-4 = 2-5 = 0.465 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 100uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (7-9 2-4 6-10 SHORT) = 10uH +0/-10uH
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-10 (7-9 2-4 SHORT) = 20pF $\pm$ 15pF
- TURN RATIO (@10KHZ, 1Vrms) :
PIN 1-5 (2-4 SHORT) : PIN 10-6 (7-9 SHORT) = 2 $\pm$ 1%
- HI-POT (@2050VAC, 1mA, 2SEC) :
PIN 1-10 (2-4 7-9 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-477B	
	RELEASE	07/17 /2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 07/17/02		SHEET 1 OF 1	
REVISIONS								DRAW <i>Pair</i>	