
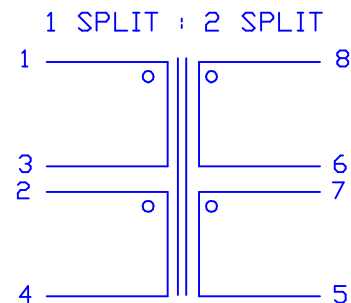
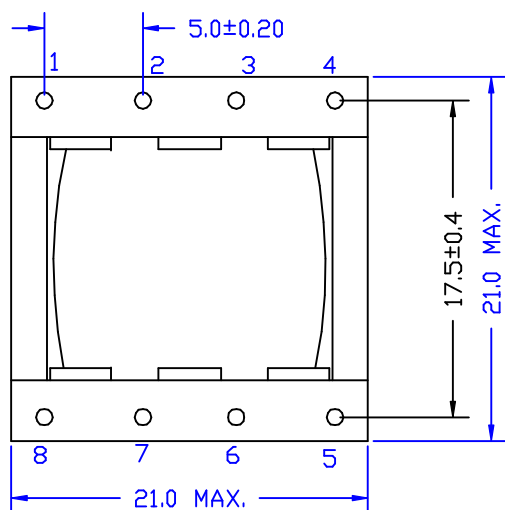


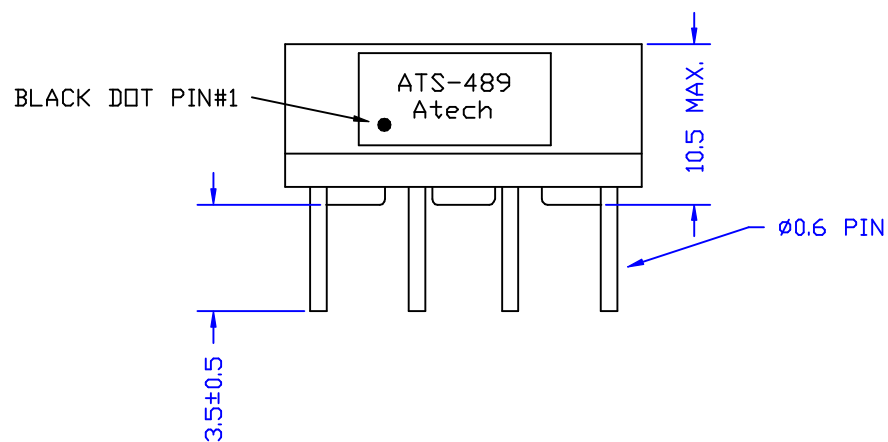

ELECTRICAL CHARACTERISTICS : (FOR 50302/P1136 COMPATIBLE)

- D.C.R. : PIN 1-3 = PIN 2-4 = $1.1 \Omega \text{M} \pm 12\%$
PIN 8-6 = PIN 7-5 = $1.225 \Omega \text{M} \pm 12\%$
- INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 1-4 (PIN 2-3 SHORT) = 27mH MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 1-4
(PIN 5-8, PIN 2-3, PIN 6-7 SHORT) = 12uH MAX.
- INTERWINDING CAP. (@1KHZ, 0.1Vrms) : PIN 1-8
(PIN 2-3, PIN 6-7 SHORT) = 130pF MAX.
- TURN RATIO (@ 10KHZ, 1Vrms) : PIN 8-5 (PIN 6-7 SHORT)
: PIN 1-4 (PIN 3-2 SHORT) = $2 \pm 1\%$
PIN 1-3 : PIN 2-4 = $1 \pm 1\%$
- HI-POT (@3000VAC, 1mA, 2SEC) : 1-8 (2-3, 6-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE HD SL TRANSFORMER	
								DWG. NO. ATS-489	
	RELEASE	12/14/00	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						00/12/14			