
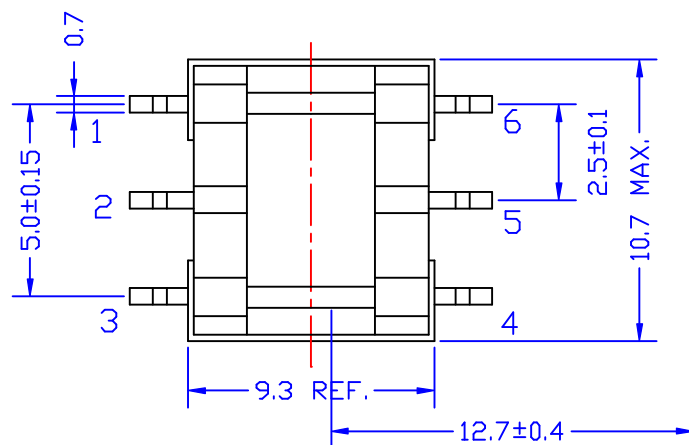
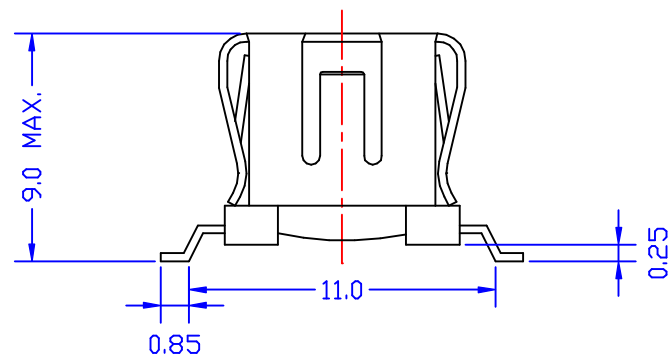
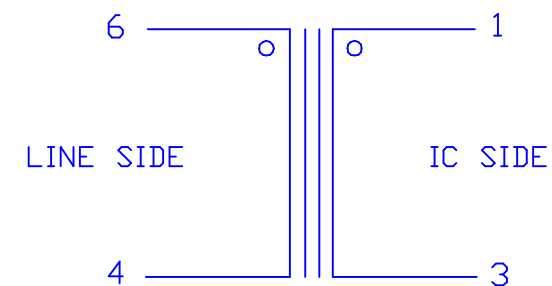


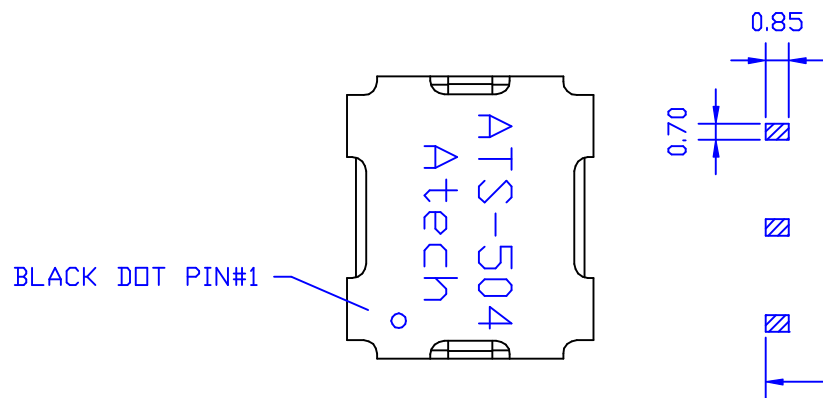

ELECTRICAL CHARACTERISTICS : (FOR C2161 COMPATIBLE)

1.D.C.R : 1-3 = 0.42 Ω HM±10% 6-4 = 1.47 Ω HM±10%

2.INDUCTANCE (@10KHZ,0.1Vrms) : 6-4 = 0.53mH±5%

3.LEAKAGE INDUCTANCE (@100KHZ,0.1Vrms) :

6-4(1-3 SHORT) = 15uH MAX.

4.INTERWINDING CAP. (@100KHZ,0.1Vrms) :

1-6 = 100pF MAX.

5.INSERTION LOSS (@100KHZ,W/H 25 Ω HM LOAD) :

6-4 = 0.5dB MAX.

6.TURN RATIO (@1MHZ,0.1Vrms) :

6-4 : 1-3 = 2±1%

7.HI-POT (@600VDC,0.5mA,1SEC) 1-6

						Atech® Atech Technology Co., Ltd. TEL:(02)788-1958 FAX:(02)788-1960	TITLE	TRANSFORMER
							DWG. NO.	ATS-504
	RELEASE					MATERIAL	UNITS:	
							M/M	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SAFETY	DRAW
REVISIONS						02/12/01		Pair