
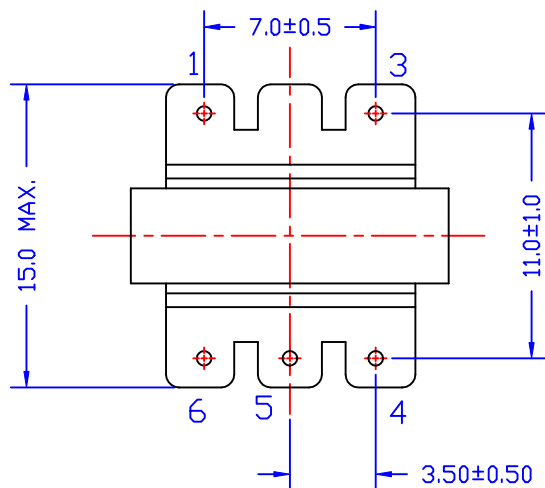
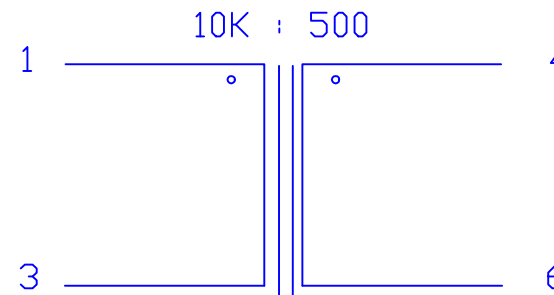


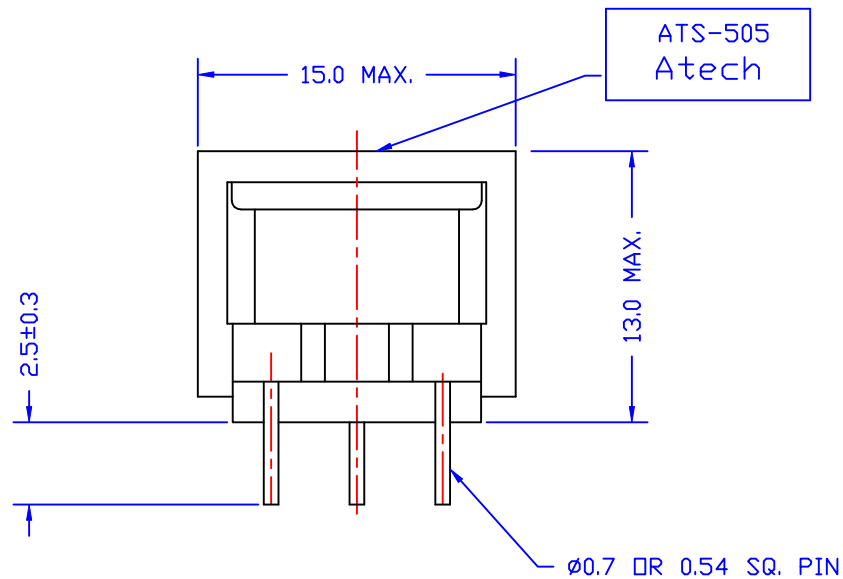

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 390 Ω HM MAX , PIN 4-6 = 22 Ω HM MAX
2. PARALLEL INDUCTANCE (@200HZ, 1Vrms) : PIN 1-3 = 21H MIN.
3. INSERTION LOSS (@1KHZ, 1Vrms, 4-6 W/H 500 Ω HM) : 0.9 dB MAX.
4. FREQ. RESP.(REF. 1KHZ): @300HZ = +/-0.35dB
@4KHZ = +/-0.35dB
5. RETURN LOSS (REF. 10k Ω HM) : @300HZ = 15 dB MIN.
@1KHZ = 20 dB MIN. @4KHZ = 25 dB MIN.
6. TURNS RATIO (@20KHZ, 1Vrms) : PIN 1-3 : 4-6 = 4.47+/-1%
7. HI-POT(1200VAC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004	TITLE 10K: 500 TRANSFORMER			
							DWG. NO. ATS-505			
	RELEASE	02/12/01	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>	
REVISIONS						02/12/01				