
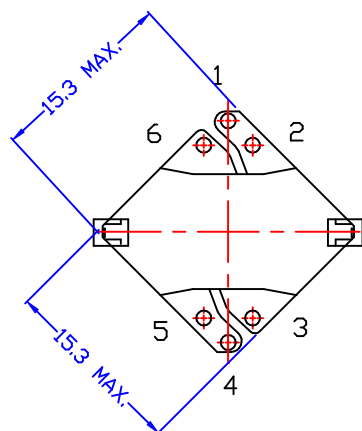
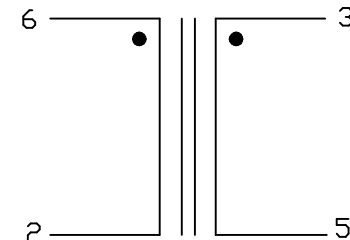
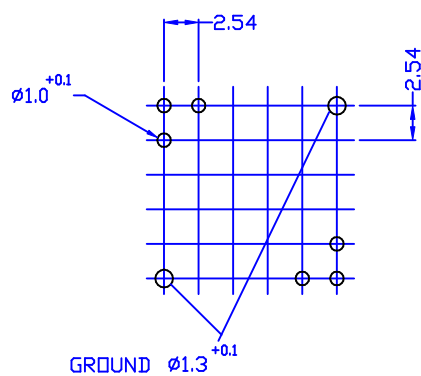


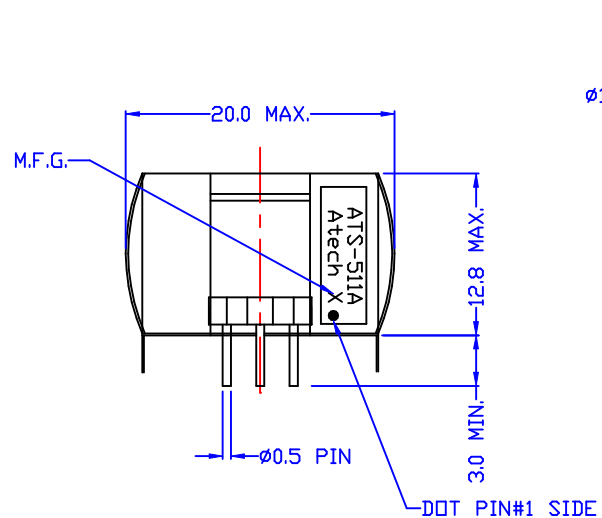

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 2-6 = 4.34 OHM MAX.
PIN 3-5 = 4.34 OHM MAX.
2. INDUCTANCE :
(@1KHZ, 1Vrms) : PIN 6-5 (2-3 SHORT) = 18mH $\pm$ 5%.
(@100mA) : PIN 6-5 (2-3 SHORT) = 16mH MIN.
3. TURN RATIO (@125KHZ, 1Vrms) :
PIN 6-2 : 3-5 = 1 $\pm$ 2%.
4. HI-POT (@500VAC, 1mA, 2S) : 6-3

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE ADSL INDUCTOR	
								DWG. NO. ATS-511A	
A	W = 20.0 MAX.	12/08 /2004	BART	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
RELEASE		04/09 /2004	BART	AL	SUEDY	DATE 04/09/04			
NO.	DESCRIPTION	DATE	BY	CHK	APPD			DRAW	Pair
REVISIONS									