
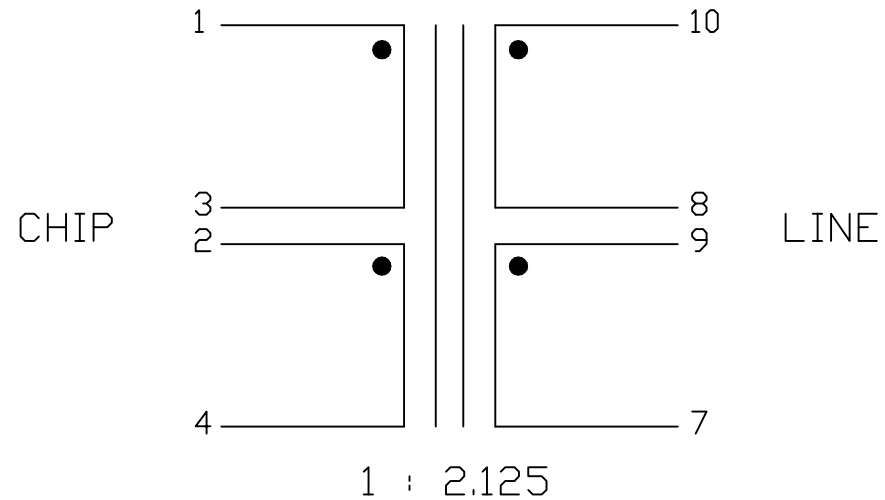
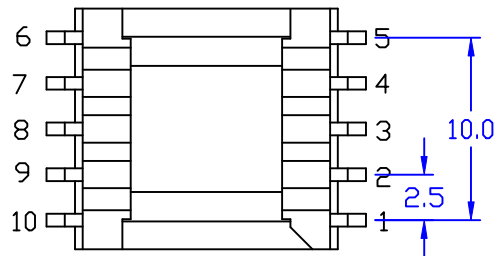



DOT PIN#1

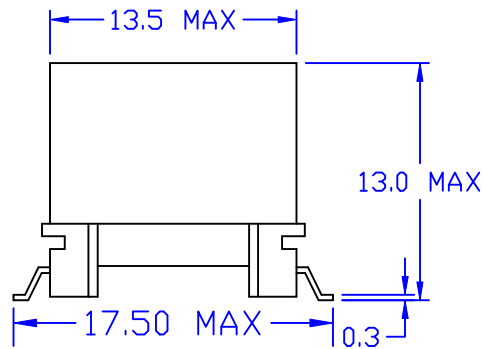

ELECTRICAL CHARACTERISTICS : <C1926 COMPATIBLE>

- DCR : PIN 1-3 = 2-4 = 0.32 OHM $\pm$ 10%
PIN 7-9 = 8-10 = 1.55 OHM $\pm$ 10%
- INDUCTANCE : <@10 KHZ, 1 Vrms, W/H 8-9 SHORT> 10-7 = 5 mH $\pm$ 10%
- LEAKAGE INDUCTANCE : <@100 KHZ, 0.1 Vrms, W/H 2-3, 8-9, 10-7 SHORT>
1-4 = 10 uH MAX.
- INTERWINDING CAP. : <@10 KHZ, 0.1 Vrms, W/H 2-3, 8-9 SHORT>
1-10 = 35 pF MAX.
- TURN RATIO : <@15 KHZ, 1 Vrms> 10-8 : 9-7 = 1 $\pm$ 1%
1-3 : 2-4 = 1 $\pm$ 1%
10-7 <8-9 SHORT> : 1-4 <2-3 SHORT> = 2.125 $\pm$ 1%
- HI-POT : <@1875 VAC, 1 mA, 2 SEC> 10-1 <8-9, 2-3 SHORT>

						Atech [®]		TITLE ADSL TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-512A	
RELEASE		06/29/2001	DOLLY		SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						06/29/01		DRAW Pair	