
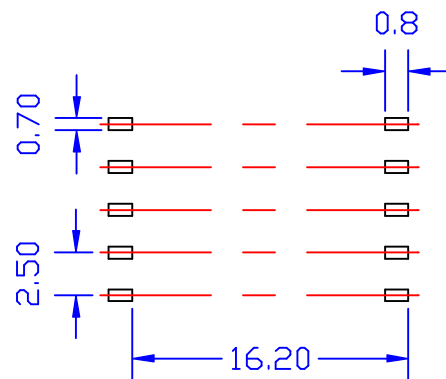
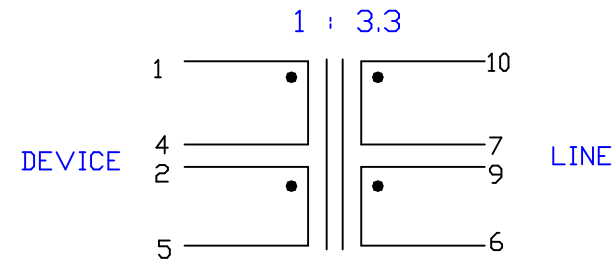


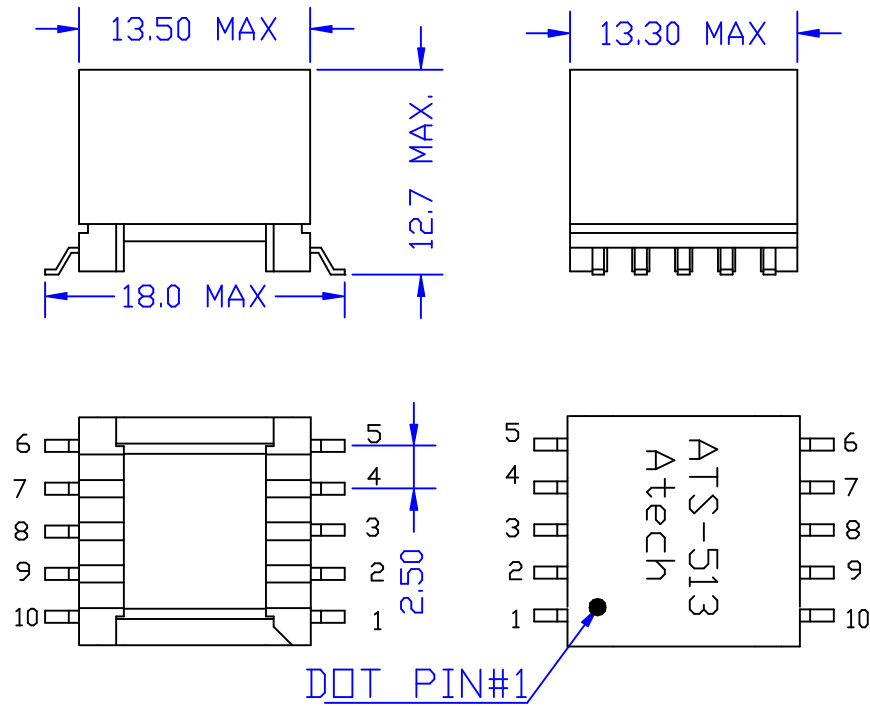

ELECTRICAL CHARACTERISTICS: (FOR 821-00363 COMPATIBLE)

1. D.C.R. : 1-4 = 2-5 = 155m Ω HM $\pm$ 12%,
10-7 = 9-6 = 566m Ω HM $\pm$ 12%
2. INDUCTANCE : (@10KHz, 0.1Vrms,) 10-6(9-7 SHORT) = 800uH $\pm$ 5%
3. LEAKAGE INDUCTANCE : (@100KHz, 0.1Vrms,):
10-6(9-7 1-5 2-4 SHORT) = 17uH MAX.
4. INTERWINDING CAP. (@10KHz, 0.1Vrms,):
1-10(2-4 9-7 SHORT) = 50pF MAX.
5. TURN RATIO : (@1.3MHz, 0.1Vrms,):
10-6(9-7 SHORT): 1-5(2-4 SHORT) = 3.3 $\pm$ 2%
6. HI-POT (@ 1875 VAC, 1mA, 1SEC) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-513	
	RELEASE	04/16/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						04/16/01		