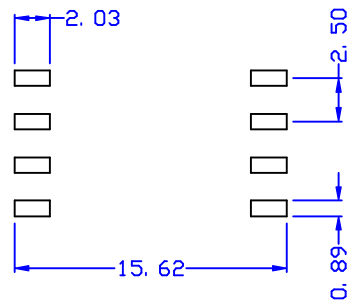
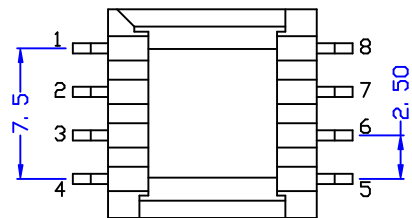
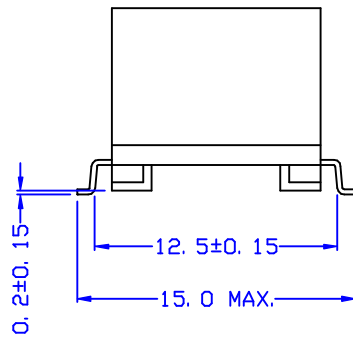
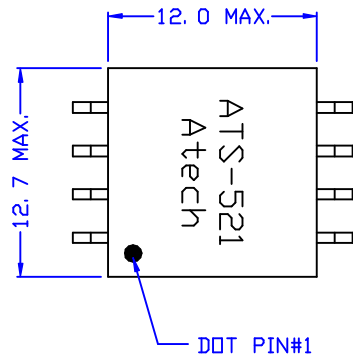


ELECTRICAL CHARACTERISTICS : <36313 COMPATIBLE>

- DCR : PIN 1-3 = 2-4 = 1 OHM MAX.
PIN 8-6 = 1.45 OHM MAX.
PIN 7-5 = 1.94 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 (W/H 2-3 SHORT) = 375uH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 1-4 (2-3 5-7 6-8 SHORT) = 6uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-8 (2-3 6-7 SHORT) = 30pF MAX.
- TURN RATIO (@400KHZ, 1Vrms) : PIN 1-3 : 2-4 = 1 ± 1%
PIN 1-4 (2-3 SHORT) : 8-5 (6-7 SHORT) = 1 ± 1%
- HI-POT (@1800VAC, 1mA, 2SEC) : PIN 1-8 (2-3 6-7 SHORT)

						Atech® Atech Technology Co. Ltd. TEL:022794-6667 FAX:022794-8004	TITLE TRANSFORMER	
A	INDUCTANCE	04/03/2002	DOLLY	CPLIU	SUEDY		DWG. NO.	ATS-521
	RELEASE	04/30/2001	DOLLY		SUEDY	UNITS: M/M	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW Pair	
REVISIONS						04/30/01		