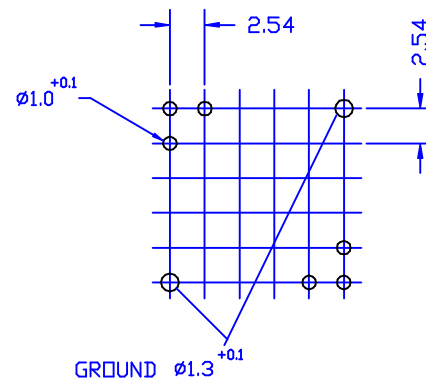
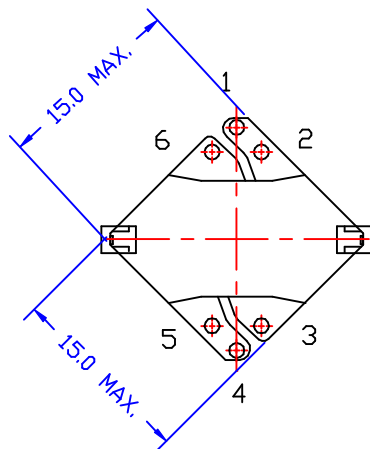
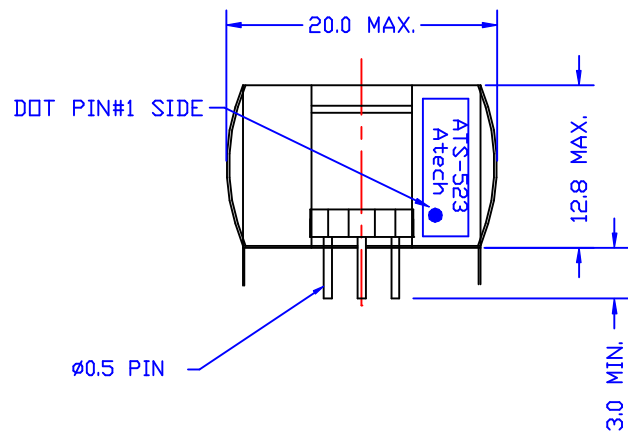


ELECTRICAL CHARACTERISTICS:

1. DCR : PIN 2-5 = 6-3 = 3.9 OHM MAX.
2. INDUCTANCE : (<@1 KHZ, 1 Vrms> PIN 2-3 <5-6 SHORT> = 24 mH $\pm$ 5%
<@100 mADC> PIN 2-3 <5-6 SHORT> = 21.6 mH MIN.
3. TURN RATIO : (<@15 KHZ, 1 Vrms> PIN 2-5 : 6-3 = 1 $\pm$ 2%
4. HI - POT : (<@500 VAC, 1 mA, 2 SEC> PRI - SEC

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE INDUCTOR FOR SPLITTER	
								DWG. NO. ATS-523	
	RELEASE	05/02/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						01/30/01			