
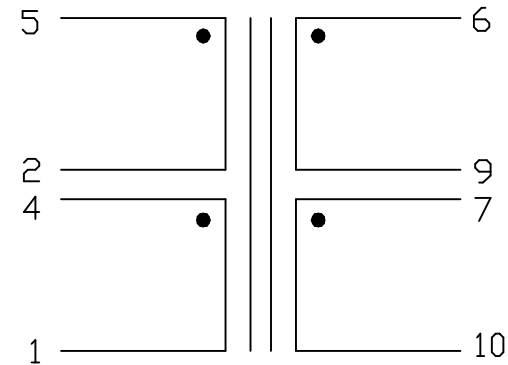

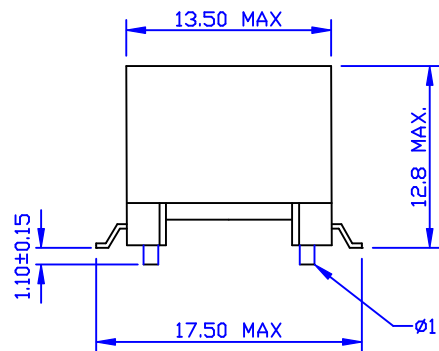
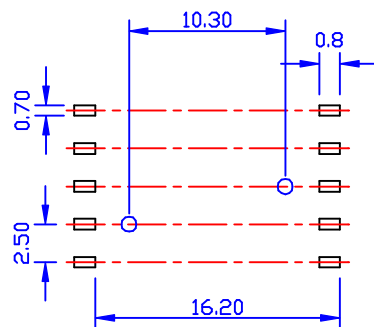


DOT PIN#1



ELECTRICAL CHARACTERISTICS : (FOR AP 0840 COMPATIBLE)

1. D.R.C. : 1-4=2-5=0.58 OHM±12% 6-9=7-10=0.59 OHM±12%
2. INDUCTANCE : (@10KHZ, 0.1Vrms) 10-6 (7-9 SHORT) =102.4 uH ± 5%
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms) 10-6 (7-9, 2-4, 1-5 SHORT) = 6uH MAX.
4. INTERWINDING CAP. : (@10KHZ, 0.1Vrms) 1-10 (W/H 2-4, 7-9 SHORT) =40pF MAX.
5. TURN RATIO : (@250KHZ, 1Vrms) 1-5 : 10-6 = 1 ± 1%
6. HI-POT : (@1875VAC, 1mA, 2SEC) 1-10 (2-4, 7-9 SHORT)

						Atech®		TITLE ADSL TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:022794-6667 FAX:022794-8004		ATS-524	
RELEASE		05/09/2001	DOLLY	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1	
NO: DESCRIPTION		DATE	BY	CHK	APPD	M/M		DRAW	
REVISIONS						05/09/01		Pair	