
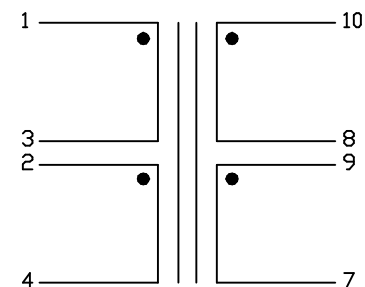
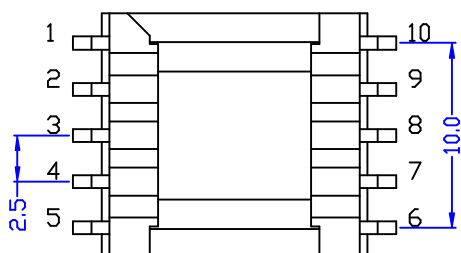
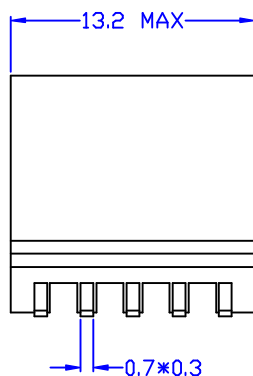


DOT PIN#1

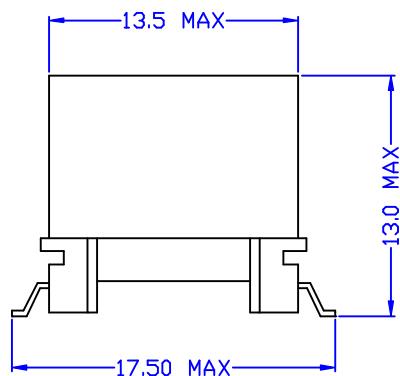

ELECTRICAL CHARACTERISTICS :

(FOR ALCATEL CHIPSET)

1. D.R.C. : PIN 1-3 = 2-4 = $0.58 \Omega \pm 12\%$
PIN 10-8 = 9-7 = $0.59 \Omega \pm 12\%$
2. INDUCTANCE (@10KHZ, 0.1Vrms, W/H 8-9 SHORT) :
PIN 10-7 = $102.4 \mu\text{H} \pm 5\%$
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms, 2-3, 8-9, 10-7 SHORT) :
PIN 1-4 = $6 \mu\text{H MAX.}$
4. INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (W/H 2-3, 8-9 SHORT) = 40pF MAX.
5. TURN RATIO (@250KHZ, 0.1Vrms, 2-3, 9-8 SHORT) :
PIN 1-4 : 10-7 = $1 \pm 1\%$
6. HI-POT (@1875VAC, 1mA, 1SEC) : PRI-SEC

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE ADSL TRANSFORMER	
B	TURN RATIO	07/03/2002	DOLLY	CPLIU		SUEDY	DWG. NO.
A	BOBBIN	01/10/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M DATE 06/15/01	SHEET 1 OF 1
	RELEASE	06/15/2001	DOLLY		SUEDY		DRAW <i>Pair</i>
NO:	DESCRIPTION	DATE	BY	CHK	APPD	REVISIONS	