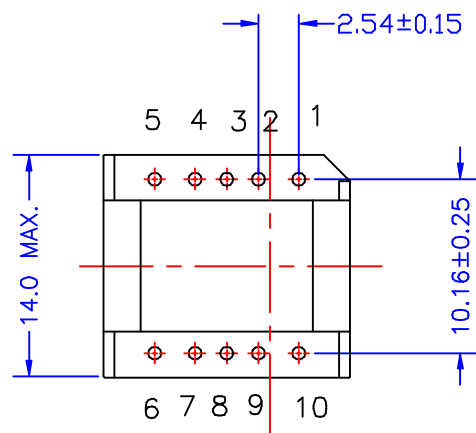
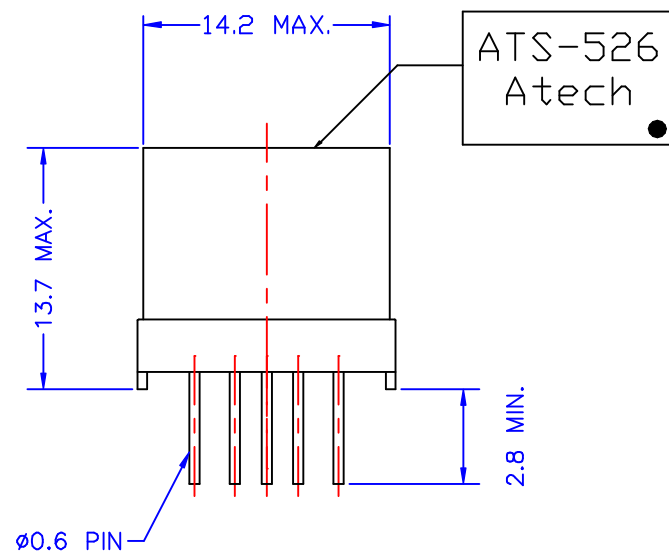


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-5 = PIN 6-10 = 2.44 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-10 (5-6 SHORT) = 8mH ± 5%
(@120mADC) = 7.2mH MIN
3. TURN RATIO (@200KHZ, 1Vrms) : PIN 1-5 : PIN 6-10 = 1 ± 2%
4. HI-POT (@500VAC, 1mA, 2SEC) : PRI - SEC

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE POTS FILTER INDUCTOR		
						DWG. NO. ATS-526		
A	H = 13.7 MAX.	06/24/2002	DOLLY	AL		SUEDY	UNITS: M/M	SAFETY
	RELEASE	05/15/2001	DOLLY			SUEDY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						05/15/01	DRAW Pair	