
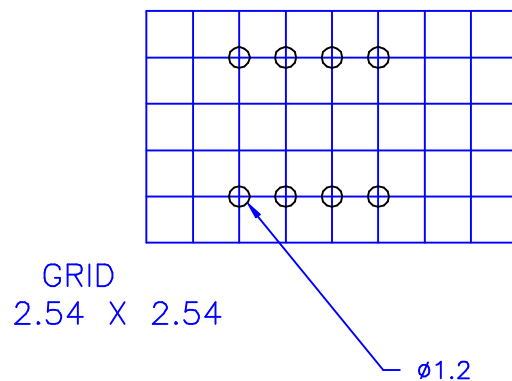
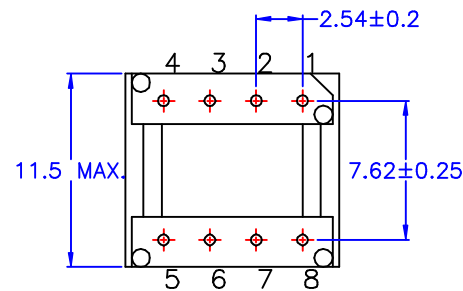
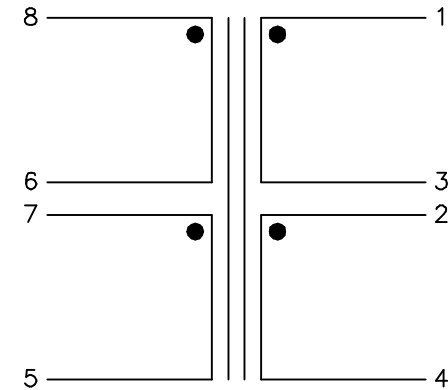



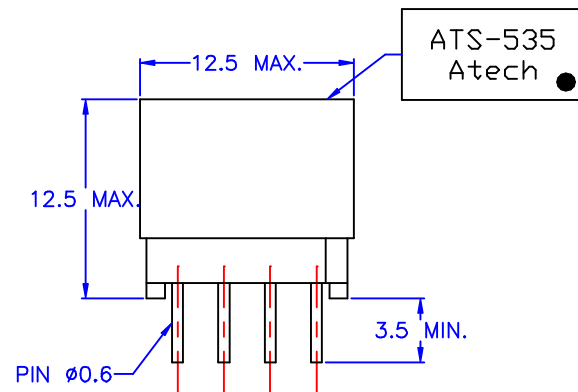

ELECTRICAL CHARACTERISTICS : (FOR TM01338 COMPATIBLE)

- DCR : PIN 1-3 = 2-4 = $0.505 \pm 12\%$
PIN 8-6 = 7-5 = $0.38 \pm 12\%$
- INDUCTANCE : (@10KHZ, 0.1Vrms) 1-4 (2-3 SHORT) = $400 \mu\text{H} \pm 5\%$
- LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms)
8-5 (2-3, 6-7, 1-4 SHORT) = $6 \mu\text{H} \text{ MAX.}$
- INSERTION LOSS : (@300KHZ, 0dBm)
(5-8 W/H 28 OHM 6-7 2-3 SHORT) 1-4 = 0.4 dB MAX.
- TURN RATIO : (@1.1MHZ, 1Vrms)
1-4 (2-3 SHORT) : 8-5 (6-7 SHORT) = $1.88 \pm 2\%$
- HI-POT (@1500VAC, 1mA, 2SEC) 1-8 (2-3, 6-7 SHORT)

						Atech®		TITLE ADSL TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-535	
						TEL:(02)2794-6667 FAX:(02)2794-8004			
	RELEASE	07/10/2001	DOLLY		SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						07/10/01		DRAW Pair	