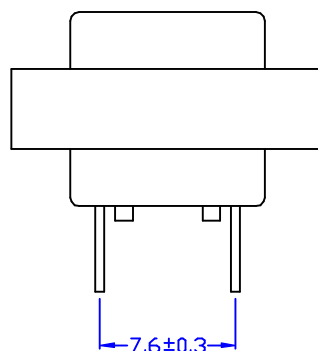
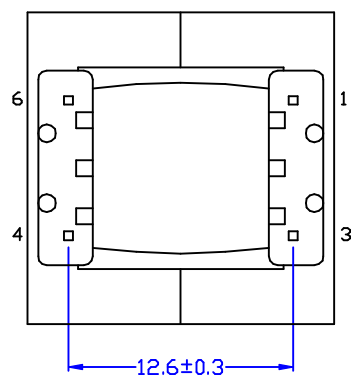
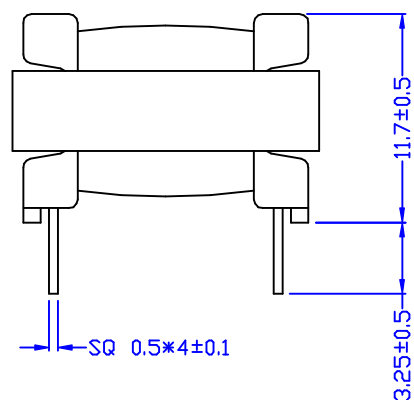
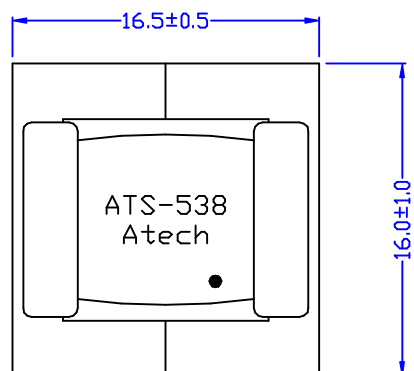


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 5.0 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-6 (3-4 SHORT) = 24mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 23.4mH $\pm$ 7%
3. INDUCTANCE BALANCE (@1KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
4. TURN RATIO (@109KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

D	BOBBIN	05/22/2002	DOLLY	JEFF	SUEDY	Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	INDUCTOR FOR SPLITTER
C	DCR, L, 17.0	01/29/2002	DOLLY	JEFF	SUEDY		DWG. NO.	ATS-538
B	LS BAL & PIN LENGTH	12/10/2001	DOLLY	CPLIU	SUEDY			
	RELEASE	08/02/2001	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair
REVISIONS						08/02/01		