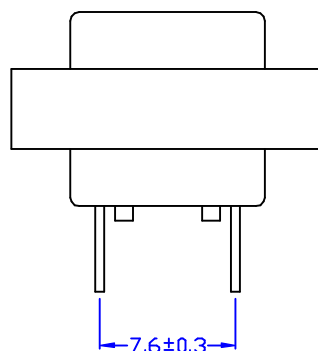
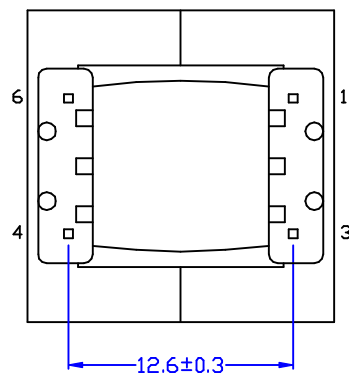
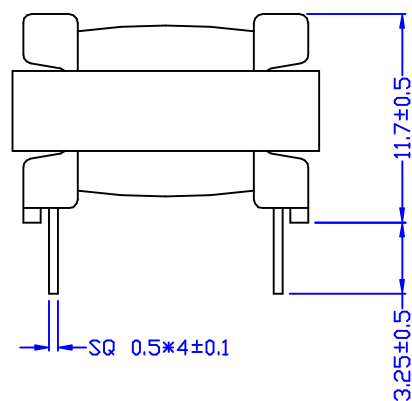
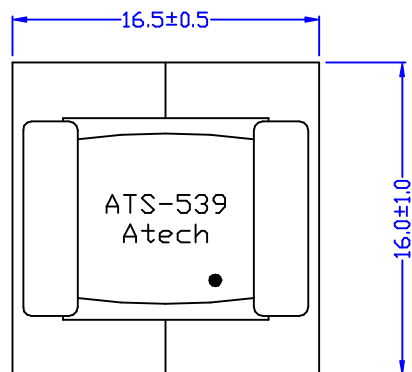


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 10.22 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-6 (3-4 SHORT) = 32mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 28.8mH MIN.
3. INDUCTANCE BALANCE (@1KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
4. TURN RATIO (@103KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

C	ELECTRICAL CHARACTERISTICS	06/06 /2002	DOLLY	JEFF	SUEDY	Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	INDUCTOR FOR SPLITTER
B	BOBBIN	05/22 /2002	DOLLY	JEFF	SUEDY		DWG. NO.	ATS-539
A	LS BAL & PIN LENGTH	12/10 /2001	DOLLY	JEFF	SUEDY			
	RELEASE	08/13 /2001	DOLLY		SUEDY			
NO	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE		DRAW Pair
						08/13/01		