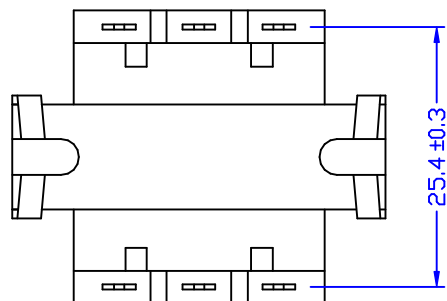
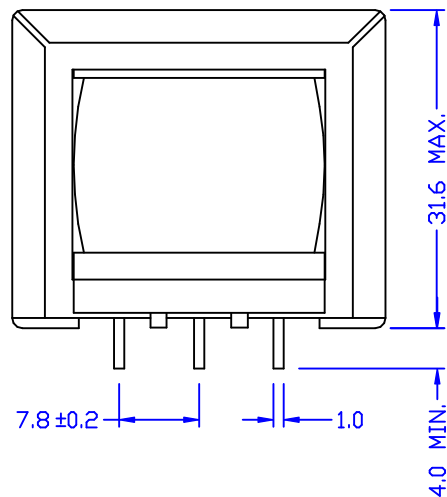
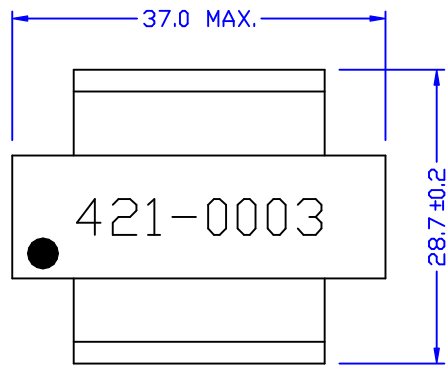


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-6 = 3-4 = 66 Ω HM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-6 = 5.3H MIN.
3. INSERTION LOSS (@1KHZ, 0dBm) : PIN 3-4 = 600 Ω HM
PIN 1-6 = 1.2dB MAX.
4. FREQ. RESP (@REF 1KHZ) : (@20HZ) = $\pm$ 0.25dB
(@20KHZ) = $\pm$ 0.1dB
5. TURN RATIO (@30KHZ, 1Vrms) : PIN 1-6 : 3-4 = 1 $\pm$ 1%
6. THD (@1KHZ, -10dBm) : PIN 1-6 = 80dB MAX.
7. HI-POT (@500VDC, 0.5mA, 2SEC) : PIN 1-3

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8804	TITLE 700 : 600 TRANSFORMER	
B	HI-POT	12/19/2001	DOLLY	CPLIU	SUEDY		DWG. NO. ATS-551	
A	MARKING	10/31/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	10/11/2001	DOLLY	CPLIU	SUEDY			
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW	Pair
REVISIONS						10/11/01		