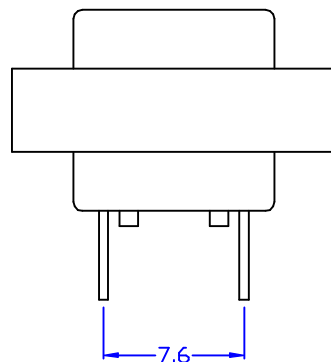
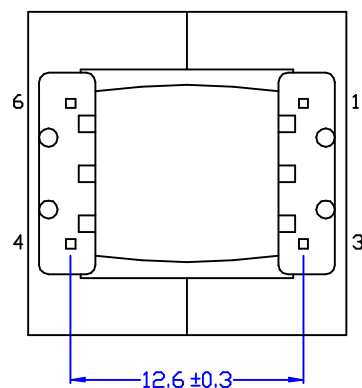
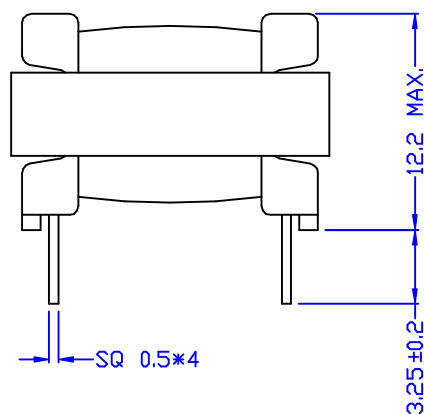
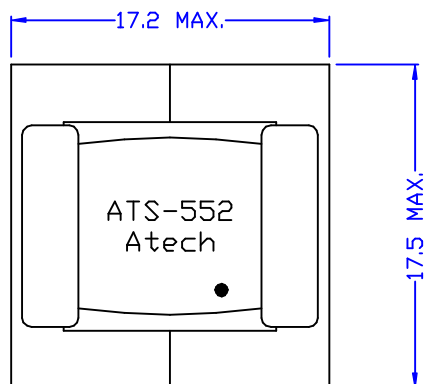


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 4-6 = 5.94 OHM MAX.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-6 (3-4 SHORT) = 22.4mH $\pm$ 5%
(@100mADC) :
PIN 1-6 (3-4 SHORT) = 20.16mH MIN.
- INDUCTANCE BALANCE (@1KHZ, 1Vrms) :
PIN 1-3 : 4-6 = 1 $\pm$ 1%
- TURN RATIO (@170KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1.5%
- HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-6

						Atech®		TITLE
B	BB	04/22/2002	DOLLY	JEFF	SUEDY	Atech Technology Co., Ltd.		INDUCTOR
A	Ls BALANCE	04/08/2002	DOLLY	JEFF	SUEDY	TEL:022794-6667 FAX:022794-8004		DWG. NO.
	RELEASE	10/09/2001	DOLLY	JEFF	SUEDY	UNITS:	SAFETY	ATS-552
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1
REVISIONS						DATE		DRAW
						10/09/01		Pair