
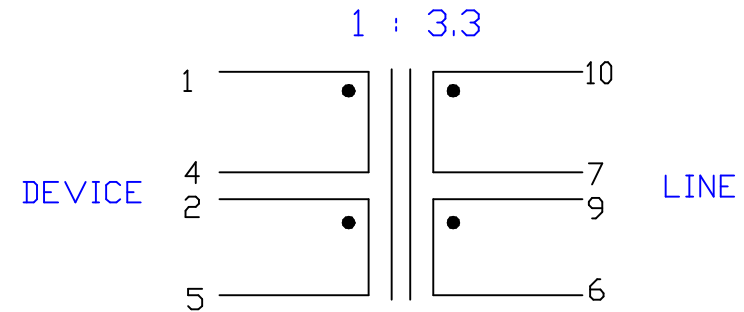
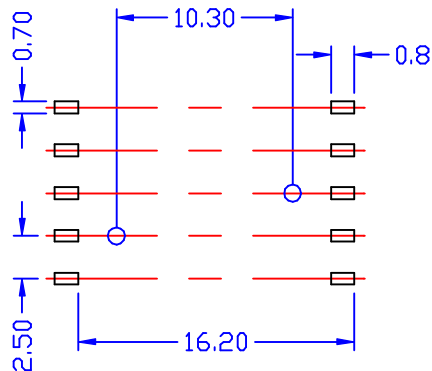
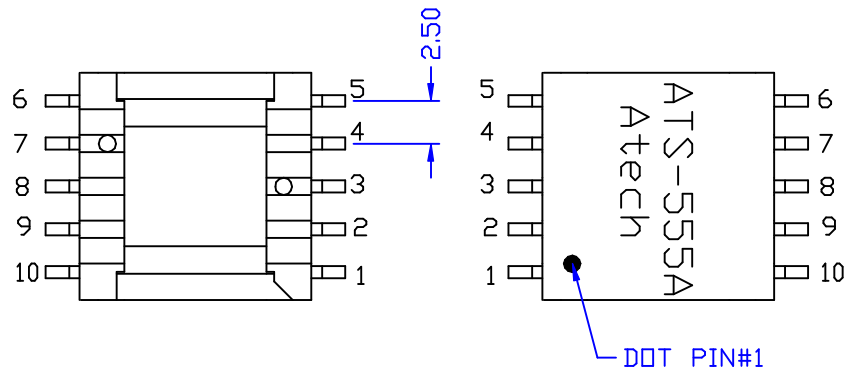



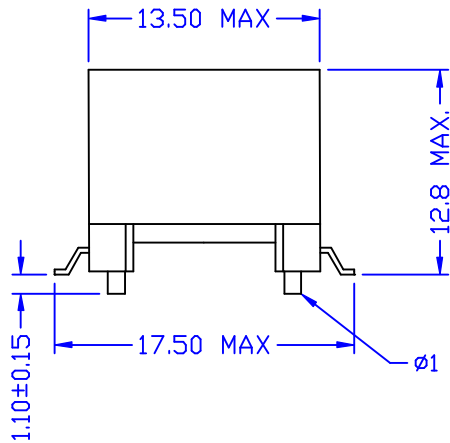

ELECTRICAL CHARACTERISTICS : (FOR 51130 COMPATIBLE)

- D.C.R. : PIN 4-1 = $0.268 \Omega \pm 12\%$
PIN 2-5 = $0.2 \Omega \pm 12\%$
PIN 6-9 = 7-10 = $0.723 \Omega \pm 12\%$
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 6-10 (9-7 SHORT) = $780\mu\text{H} \pm 6\%$
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 6-10 (W/H 7-9 2-4 1-5 SHORT) = $20\mu\text{H} \text{ MAX.}$
- INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 6-5 (W/H 7-9 2-4 SHORT) = $30\text{pF} \text{ MAX.}$
- TURN RATIO (@15KHz, 0.1Vrms) :
PIN 6-10 (9-7 SHORT) : PIN 5-1 (2-4 SHORT) = $3.3 \pm 1\%$
- HI-POT (@3000VAC, 1mA, 1SEC) : PIN 6-5 (7-9 2-4 SHORT)

						Atech®		TITLE	ADSL
						Atech Technology Co., Ltd.		TRANSFORMER	
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.	ATS-555A
A	DCR	11/09/2001	DOLLY	CPLIU	SUEDY	UNITS:		SAFETY	
	RELEASE	11/05/2001	DOLLY	CPLIU	SUEDY	M/M		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	
REVISIONS						11/05/01		Pair	