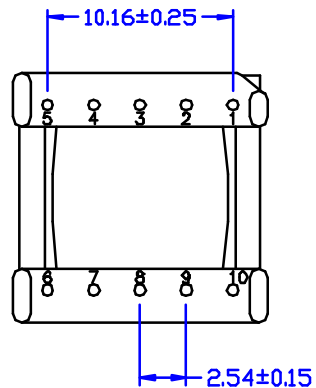
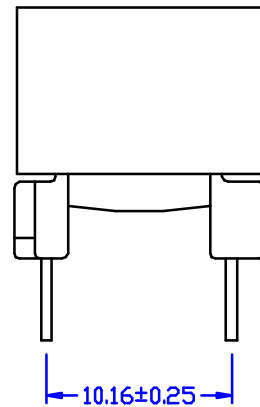
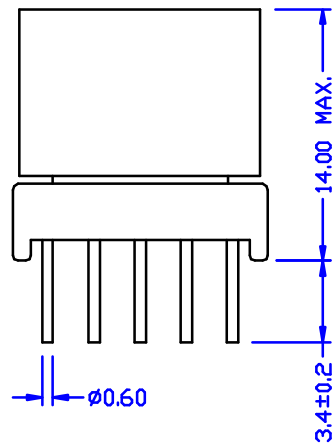
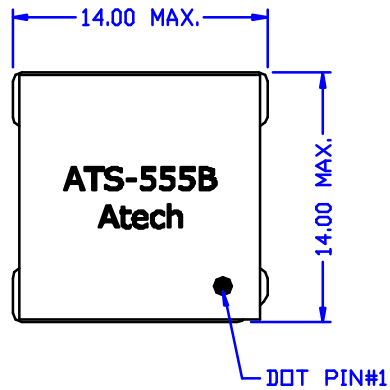


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 4-1 = 0.268 OHM $\pm$ 12%
PIN 2-5 = 0.2 OHM $\pm$ 12%
PIN 6-9 = 7-10 = 0.723 OHM $\pm$ 12%
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 6-10 (9-7 SHORT) = 780uH $\pm$ 6%
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 6-10 (W/H 7-9 2-4 1-5 SHORT) = 20uH MAX.
- INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 6-5 (W/H 7-9 2-4 SHORT) = 30pF MAX.
- TURN RATIO (@15KHz, 0.1Vrms) :
PIN 6-10 (9-7 SHORT) : PIN 5-1 (2-4 SHORT) = 3.3 $\pm$ 1%
- HI-POT (@3000VAC, 1mA, 1SEC) : PIN 6-5 (7-9 2-4 SHORT)

					Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004	TITLE ADSL TRANSFORMER		
						DWG. NO. ATS-555B		
A	PIN L = 3.4±0.2	08/05/2005	BART	ANDY		SUEDY	UNITS: M/M	SAFETY
	RELEASE	02/17/2003	DOLLY	SUEDY		SUEDY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						02/17/03	DRAW <i>Pair</i>	