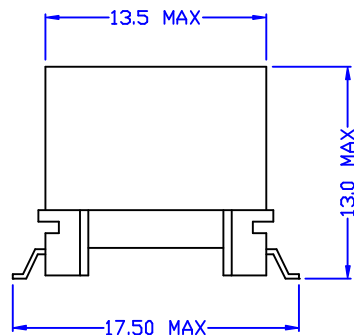
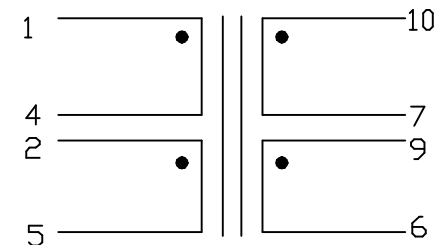



ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-4 = 73 mΩHM ±15%.
PIN 2-5 = 54 mΩHM ±15%.
PIN 6-9 = 494 mΩHM ±15%.
PIN 7-10 = 494 mΩHM ±15%.
2. INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 6-10 (7-9 SHORT) = 800uH ± 5%.
W/H 600mA = 90 uH MIN.
3. LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 6-10 (7-9, 2-4, 1-5 SHORT) = 20uH MAX.
4. INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 6-5 (7-9, 2-4 SHORT) = 35 pF MAX.
5. TURN RATIO (@15KHz, 0.1Vrms) :
PIN 6-10/5-1 (7-9, 2-4 SHORT) = 3.3 ± 2%.
6. HI-POT (@3KVAC, 1mA, 1SEC) :
PIN 6-5 (7-9, 2-4 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-555D	
	RELEASE	02/14/2005	BART	EEFLYS	SUEDY	UNITS: M/M		SAFETY	SHEET 1 of 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/14/05			
REVISIONS								DRAW <i>Pair</i>	