
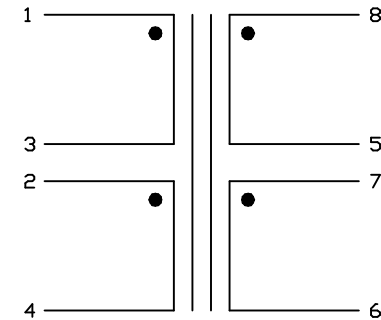

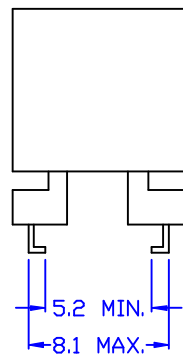





ELECTRICAL CHARACTERISTICS :

- DCR : PIN 8-5 = 0.317 OHM $\pm$ 12%
PIN 7-6 = 0.38 OHM $\pm$ 12%
PIN 2-4 = 1-3 = 1.4 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 (W/H 2-3 SHORT) = 1.2mH $\pm$ 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 1-4 (2-3 5-7 6-8 SHORT) = 15uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-8 (2-3 5-7 SHORT) = 50pF MAX.
- TURN RATIO (@600KHZ, 1Vrms) : PIN 1-4 (2-3 SHORT) : 8-6 (5-7 SHORT) = 3 $\pm$ 1%
- HI-POT (@1500VAC, 1mA, 2SEC) : PIN 1-8 (2-3 5-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-556A	
	RELEASE	02/06/2002	DOLLY	CPLIU	SUEDY			UNITS: M/M	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SAFETY		SHEET 1OF 1
REVISIONS						02/06/02		DRAW <i>Pair</i>	