

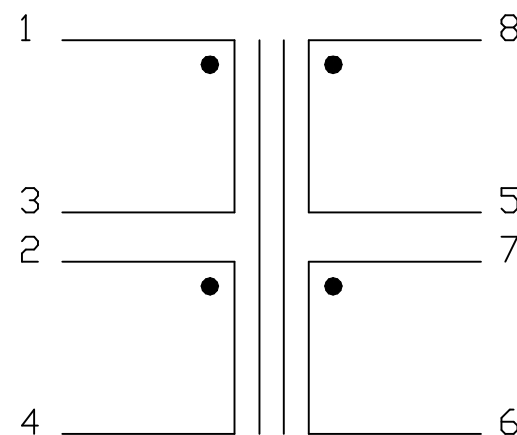
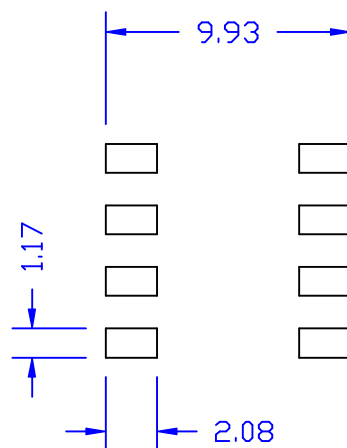
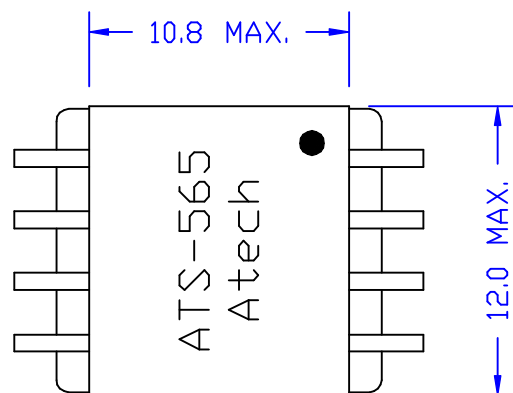


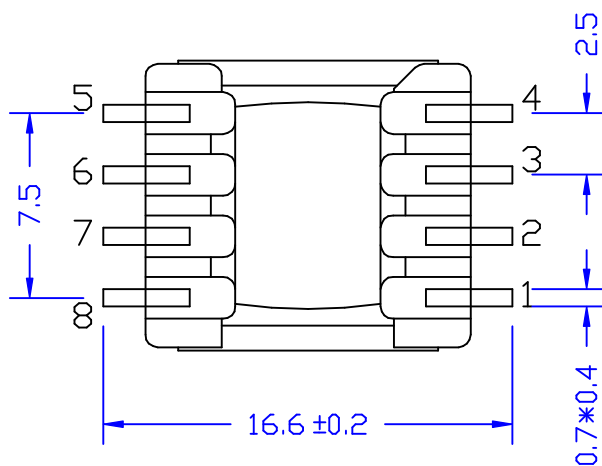

2.79 : 1

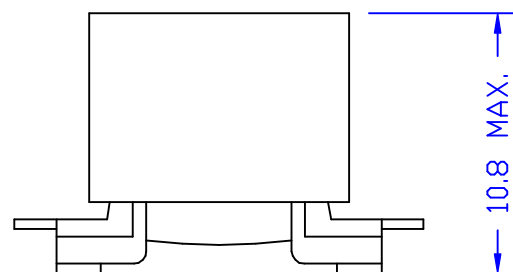

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 0.94 OHM $\pm$ 12%
PIN 8-5 = 0.374 OHM $\pm$ 12%
PIN 7-6 = 0.24 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 (W/H 2-3 SHORT) = 1.2mH $\pm$ 8%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (W/H 2-3 5-7 6-8 SHORT) = 18uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-8 (W/H 2-3 5-7 SHORT) = 30pF MAX.
- TURN RATIO (@1MHZ, 1Vrms) :
PIN 1-4 (W/H 2-3 SHORT) : PIN 8-6 (W/H 7-5 SHORT) = 2.79 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-8 (W/H 2-3 5-7 SHORT)

						Atech®		TITLE ADSL TRANSFORMER	
						Atech Technology Co. Ltd.		DWG. NO.	
						TEL:022794-6667 FAX:022794-8804		ATS-565	
RELEASE		10/22/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						10/22/01		DRAW Pair	