

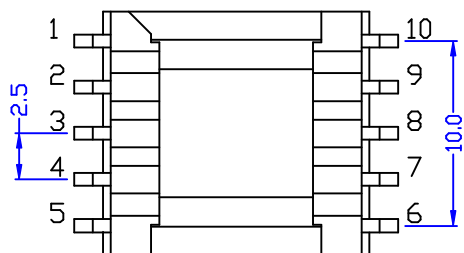
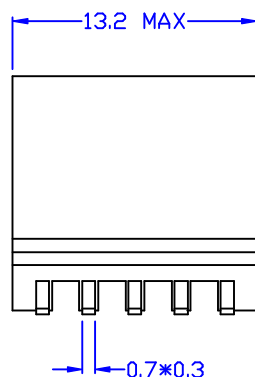


DOT PIN#1

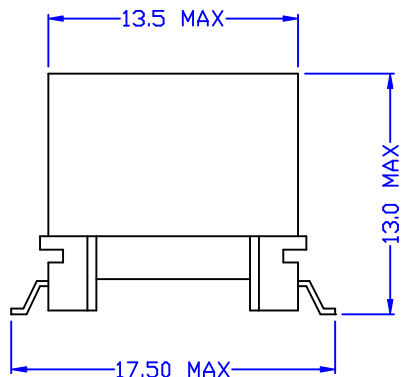

ELECTRICAL CHARACTERISTICS :

<51264R S560-6600-N7 COMPATIBLE>

- DCR : PIN 1-4 = 2-5 = $1.4 \Omega \pm 10\%$
PIN 7-9 = $2.8 \Omega \pm 10\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (W/H 2-4 SHORT) = $3\text{mH} \pm 6\%$
(W/H 100mADC) : PIN 1-5 (W/H 2-4 SHORT) = $3\text{mH} \pm 6\%$
- INTERWINDING CAP. (@10KHZ, 1Vrms) :
PIN 1-9 (W/H 2-4 SHORT) = 65pF MAX.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (W/H 2-4, 9-7 SHORT) = $18\mu\text{H MAX.}$
- TURN RATIO (@50KHZ, 1Vrms) :
PIN 1-5 (W/H 2-4 SHORT) : 9-7 = $5.4 \pm 2\%$
- HI-POT (@2050VAC, 1mA, 1SEC) : PIN 1-9 (W/H 2-4 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE ADSL TRANSFORMER	
A	DCR	04/23/2002	DOLLY	CPLIU	SUEDY		DWG. NO. ATS-579	
	RELEASE	01/10/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair
REVISIONS						01/10/02		