
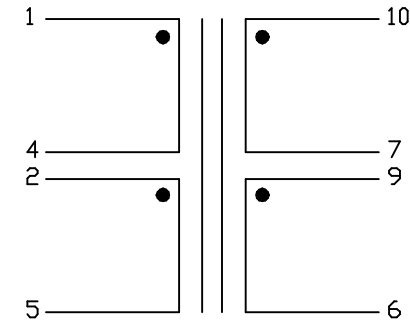
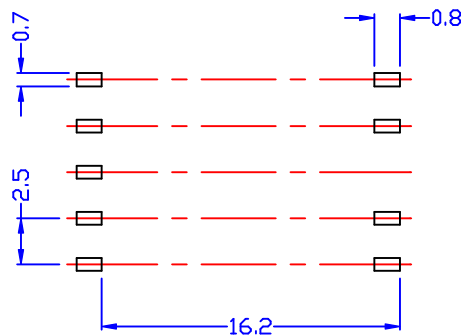
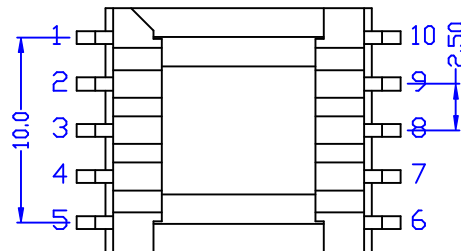
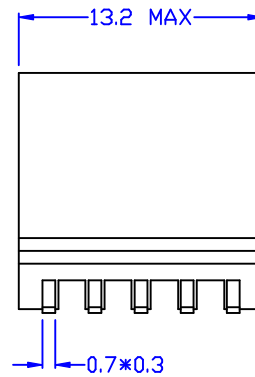


DOT PIN#1

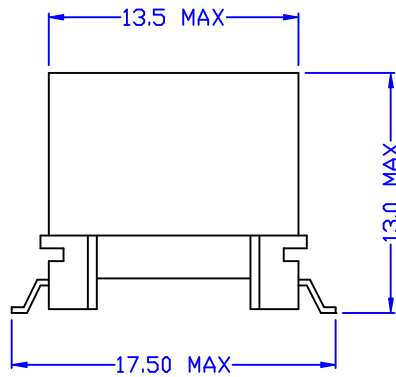

ELECTRICAL CHARACTERISTICS : <AP 0775 COMPATIBLE>

- DCR : PIN 1-4 = 2-5 = 0.4 OHM MAX.
PIN 10-7 = 9-6 = 0.2 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 410uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (W/H 2-4 9-6 10-7 SHORT) = 10uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-10 (2-4 7-9 SHORT) = 35pF MAX.
- TURN RATIO (@7KHZ, 1Vrms) :
PIN 1-5 (2-4 SHORT) : PIN 10-6 (9-7 SHORT) = 2 $\pm$ 1%
- HI-POT (@2000VAC, 1mA, 60SEC) : PIN 1-10

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-582	
	RELEASE	01/28/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						01/28/02		DRAW <i>Pair</i>