
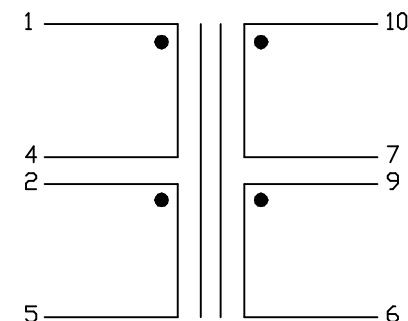
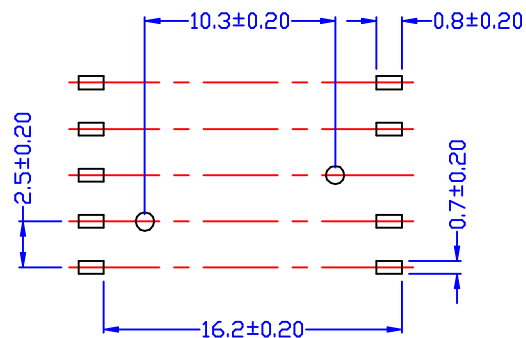
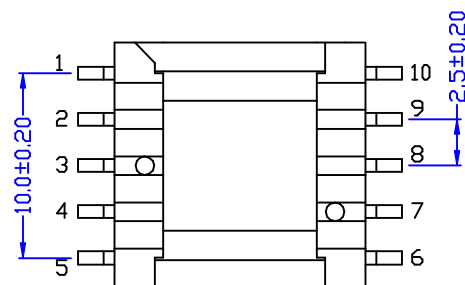
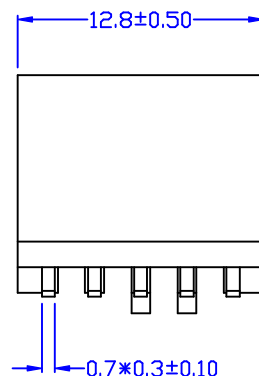
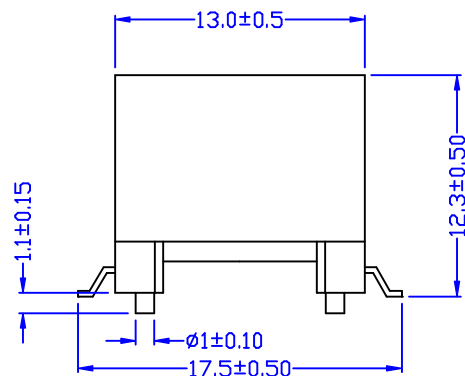


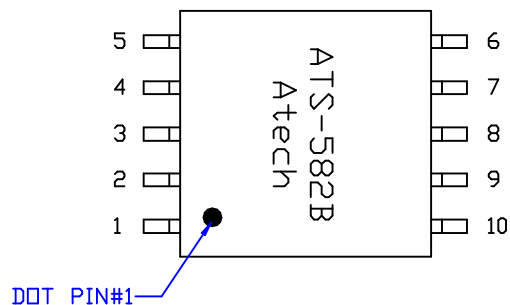

ELECTRICAL CHARACTERISTICS : (LAL0215 COMPATIBLE)

- DCR : PIN 1-4 = 2-5 = 0.77 OHM ± 12%
PIN 10-7 = 9-6 = 0.195 OHM ± 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 410uH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (W/H 2-4 9-6 10-7 SHORT) = 8 +0/-8uH
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-10 (2-4 7-9 SHORT) = 27 ± 12pF
- TURN RATIO (@7KHZ, 1Vrms) :
PIN 1-5 (2-4 SHORT) : PIN 10-6 (9-7 SHORT) = 2 ± 1%
- HI-POT (@2000VAC, 1mA, 2SEC) : PIN 1-10

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE		ADSL TRANSFORMER			
								DWG. NO.		ATS-582B			
	RELEASE	04/16/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY		SHEET 1 OF 1			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE				DRAW		Pair	
REVISIONS						04/16/02							