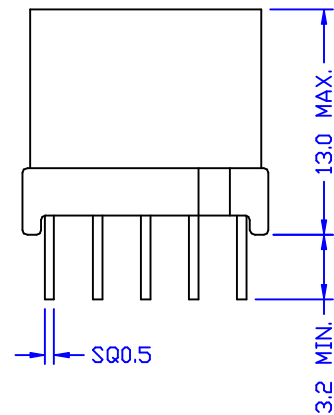
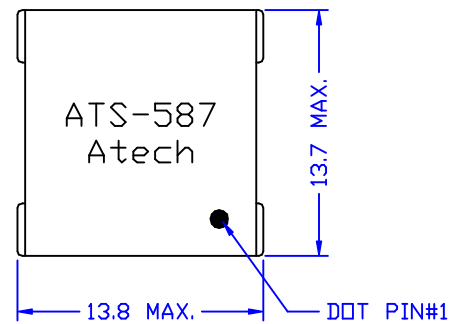


ELECTRICAL CHARACTERISTICS : <FOR 51481 COMPATIBLE>

- DCR : PIN 10-8 = 9-7 = 0.335 OHM $\pm$ 10%
PIN 1-3 = 0.27 OHM $\pm$ 10%
PIN 2-4 = 0.335 OHM $\pm$ 10%
- INDUCTANCE (@100KHZ, 2Vrms) : PIN 1-4 (W/H 2-3 SHORT) = 100uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (8-9 2-3 7-10 SHORT) = 4uH MAX.
- INTERWINDING CAP. (@10KHZ, 1Vrms) : PIN 1-10 (2-3 8-9 SHORT) = 40pF MAX.
- TURN RATIO (@1.3MHZ, 1Vrms) :
PIN 10-7 (8-9 SHORT) : PIN 1-4 (2-3 SHORT) = 1.1 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-10 (8-9 2-3 SHORT)

						Atech® Atech Technology Co. Ltd. TEL:022794-6667 FAX:022794-8804		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-587	
	RELEASE	01/21/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						01/21/02			