
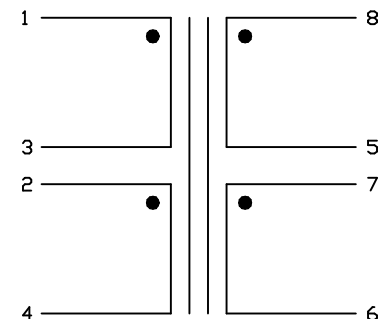

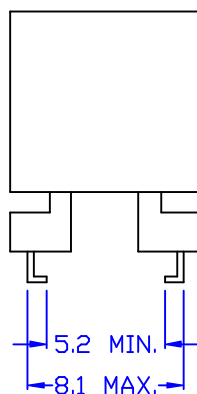
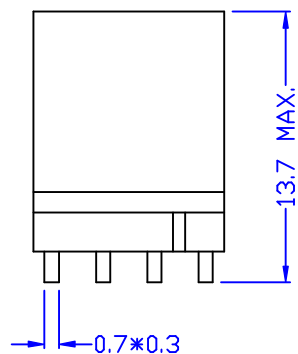




ELECTRICAL CHARACTERISTICS : (51337R COMPATIBLE)

- DCR : PIN 7-6 = 0.155 OHM $\pm$ 12%
PIN 1-3 = 2-4 = 0.8 OHM $\pm$ 12%
PIN 8-5 = 0.195 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 (2-3 SHORT) = 171uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 1-4 (W/H 2-3 7-5 8-6 SHORT) = 11uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-8 (2-3 5-7 SHORT) = 50pF MAX.
- TURN RATIO (@2MHZ, 1Vrms) : PIN 1-4 (2-3 SHORT) : 8-6 (5-7 SHORT) = 2.8 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-8 (2-3 5-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-588	
	RELEASE	02/26/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/26/02			
REVISIONS								SHEET 1 OF 1	
								DRAW <i>Pair</i>	