
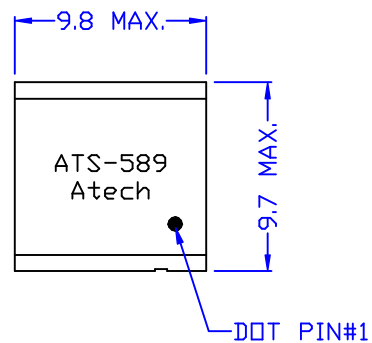


1:1SP : 1SP

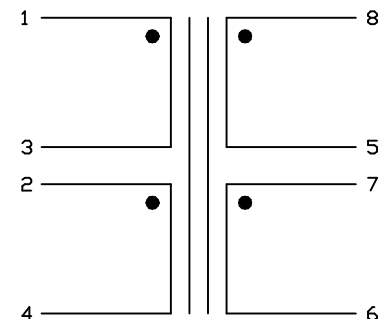

ELECTRICAL CHARACTERISTICS : (51377R COMPATIBLE)

- DCR : PIN 7-6 = 0.4 OHM $\pm$ 12%
PIN 1-3 = 2-4 = 0.61 OHM $\pm$ 12%
PIN 8-5 = 0.55 OHM $\pm$ 12%
- INDUCTANCE (@100KHZ, 2Vrms) : PIN 8-6 (5-7 SHORT) = 100uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 8-6 (5-7 2-3 1-4 SHORT) = 4uH MAX.
- INTERWINDING CAP. (@10KHZ, 1Vrms) : PIN 1-8 (2-3 5-7 SHORT) = 35pF MAX.
- TURN RATIO (@1.25MHZ, 0.1Vrms) : PIN 1-4 (2-3 SHORT) : 8-6 (5-7 SHORT) = 1.1 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-8 (2-3 5-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER
								DWG. NO. ATS-589
	RELEASE	03/05/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/05/02		
REVISIONS						DRAW <i>Pair</i>		