
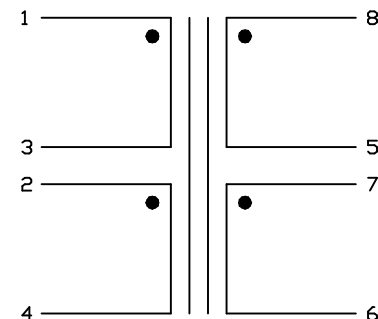

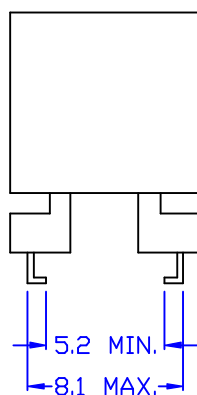
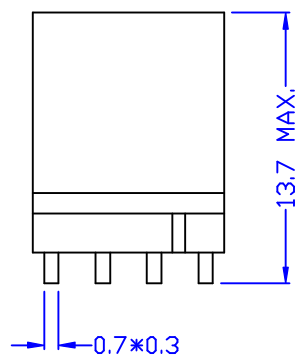




ELECTRICAL CHARACTERISTICS :

- DCR : PIN 8-5 = 2.05 OHM $\pm$ 12%
PIN 7-6 = 2.6 OHM $\pm$ 12%
PIN 2-4 = 1-3 = 1 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 8-6 (5-7 SHORT) = 800uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 8-6 (2-3 1-4 5-7 SHORT) = 8uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-8 (2-3 5-7 SHORT) = 65pF MAX.
- TURN RATIO (@300KHZ, 1Vrms) : PIN 8-6 (5-7 SHORT) : 1-4 (2-3 SHORT) = 1.416 $\pm$ 1%
- HI-POT (@1500VAC, 1mA, 2SEC) : PIN 1-8 (2-3 5-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE TRANSFORMER		
								DWG. NO. ATS-592		
	RELEASE	02/22/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE				DRAW <i>Pair</i>
REVISIONS						02/22/02				