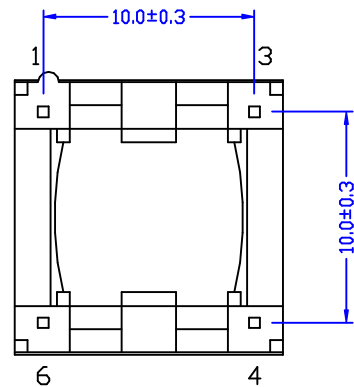
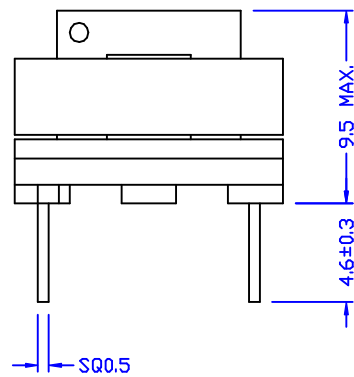
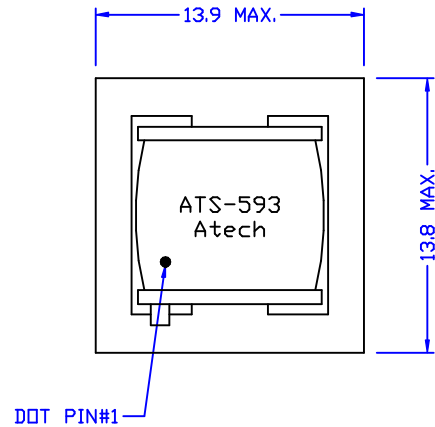


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 4-6 = 2.04 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 50mVrms) : PIN 1-6 (3-4 SHORT) = 6mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 5.4mH MIN.
3. INDUCTANCE BALANCE (@1KHZ, 1Vrms) : PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
4. TURN RATIO (@150KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 1%
5. HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-4

C	DIM	01/08/2003	DOLLY	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:028794-6667 FAX:028794-8004	TITLE	INDUCTOR
B	INDUCTANCE	11/19/2002	DOLLY	AL	SUEDY		DWG. NO.	ATS-593
A	TURN RATIO	10/31/2002	DOLLY	JEFF	SUEDY			
	RELEASE	01/30/2002	DOLLY	JEFF	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
ND	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE		DRAW
						01/30/02		Pair