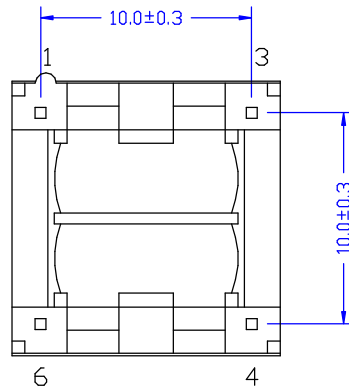
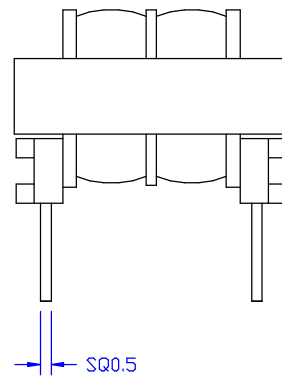

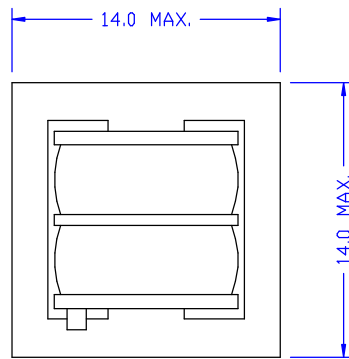


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 4-6 = 2.04 OHM $\pm$ 12%
- INDUCTANCE (@1KHZ, 50mVrms) : PIN 1-6 (3-4 SHORT) = 6mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 5.4mH MIN.
- INDUCTANCE BALANCE (@1KHZ, 1Vrms) : PIN 1-3 : PIN 4-6 = 1 $\pm$ 3%
- TURN RATIO (@260KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 3%
- HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE INDUCTOR
								DWG. NO. ATS-593A
A	ELECTRICAL	08/12/2003	RDRY	AL	SUEDY	UNITS: M/M		SAFETY
	RELEASE	05/16/2003	RDRY	YEN	SUEDY	DATE 05/16/03		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 05/16/03		SHEET 1 OF 1
REVISIONS								DRAW Pair