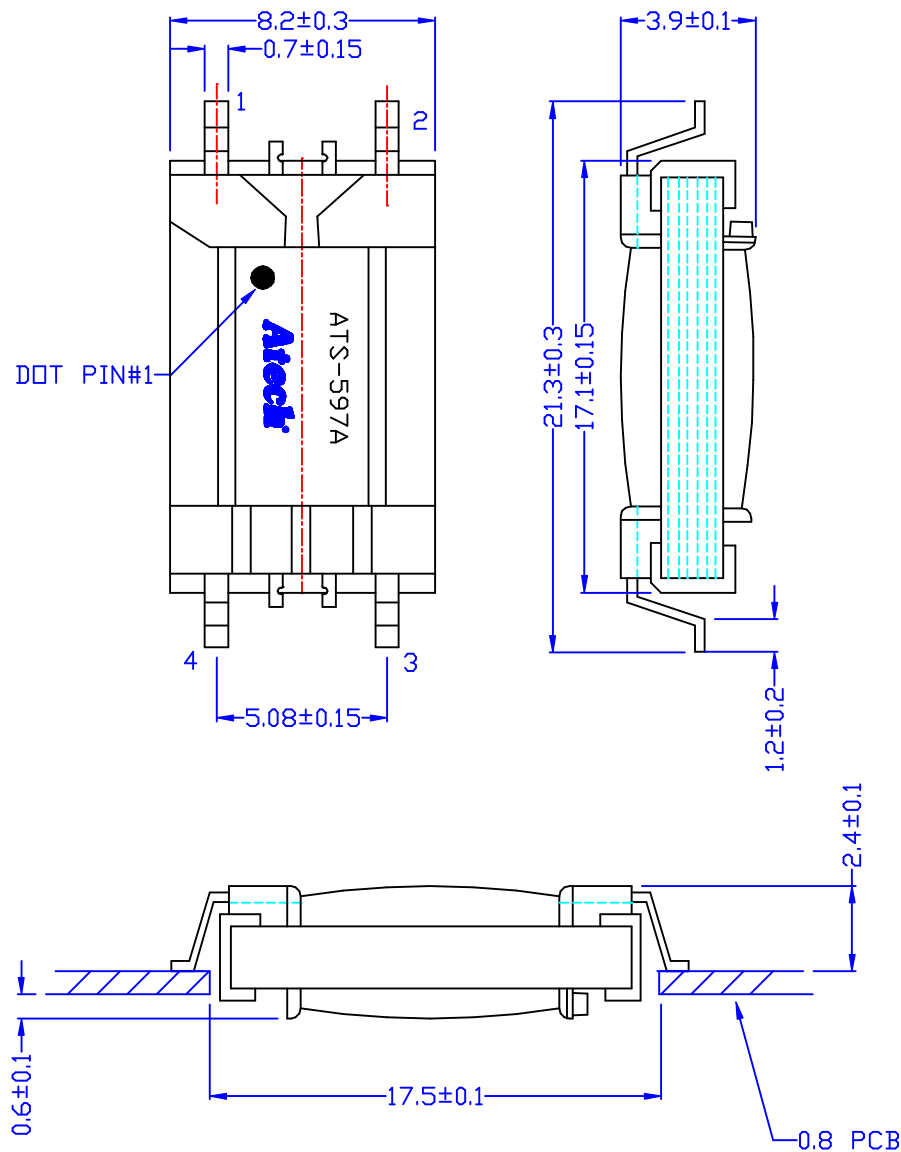


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 176 OHM $\pm$ 12%
PIN 3-4 = 153 OHM $\pm$ 12%
- INDUCTANCE PARALLEL (@1KHZ, 1Vrms) : PIN 1-2 = 3H $\pm$ 30%
- INSERTION LOSS (@1KHZ, 0dBm, 3-4 W/H 287 OHM) : PIN 1-2 = 3.4dB $\pm$ 0.5%
- FREQ. RESP. (@200HZ) = $\pm$ 0.2dB
(@4KHZ) = $\pm$ 0.2dB
- RETURN LOSS (@10dBm, 3-4 W/H 287 OHM) : @200HZ = 23dB +17/-0
@1KHZ = 23dB +17/-0
@4KHZ = 23dB +17/-0
- TURN RATIO (@36KHZ, 1Vrms) : PIN 1-2 : PIN 4-3 = 1 $\pm$ 1%
- HI-POT (@1650VAC, 1mA, 2SEC) : PRI-SEC

						Atech®		TITLE 600 : 287 TRANSFORMER	
						Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO. ATS-597A	
A	外觀	11/27/2002	DOLLY	KEVIN	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
	RELEASE	07/15/2002	DOLLY	JEFF	SUEDY	DATE 07/15/02			DRAW <i>Pair</i>
NO.	DESCRIPTION	DATE	BY	CHK	APPD	REVISIONS			