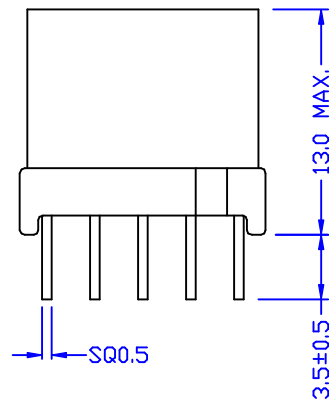
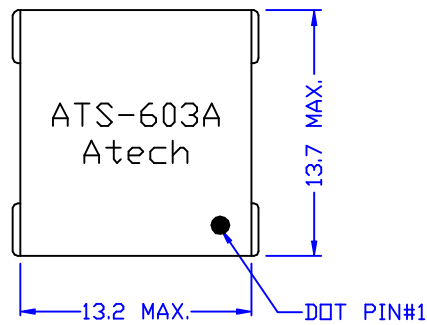


ELECTRICAL CHARACTERISTICS : <51473 COMPATIBLE>

- DCR : PIN 1-4 = 2-5 = $0.98 \Omega \pm 12\%$
PIN 9-7 = $0.138 \Omega \pm 12\%$
PIN 10-6 = $0.91 \Omega \pm 12\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = $3mH \pm 10\%$
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (2-4 7-9 SHORT) = $15\mu H \text{ MAX.}$
- INTERWINDING CAP. (@10KHZ, 1Vrms) : PIN 1-9 (2-4 SHORT) = $50pF \text{ MAX.}$
- TURN RATIO (@15KHZ, 1Vrms) : PIN 1-5 (2-4 SHORT) : PIN 9-7 = $4.25 \pm 1.5\%$
PIN 1-5 (2-4 SHORT) : PIN 10-6 = $2.5 \pm 3\%$
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-10 (2-4 6-9 SHORT)

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-603A	
	RELEASE	05/17/2003	RORY	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						05/17/03			