
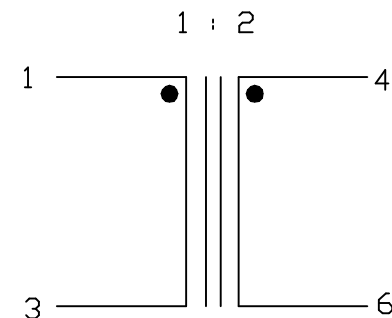
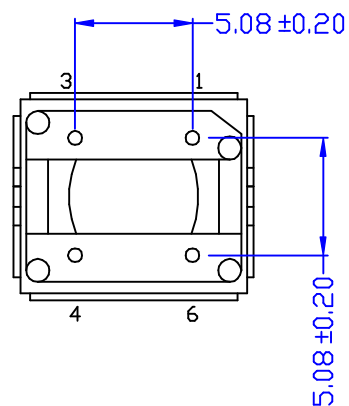
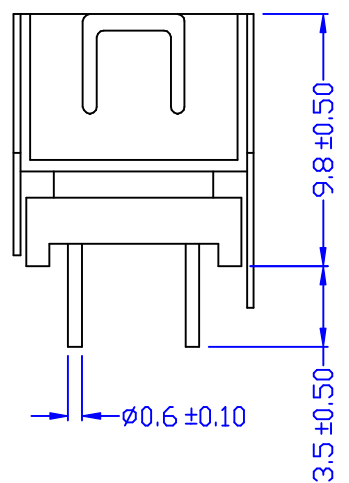


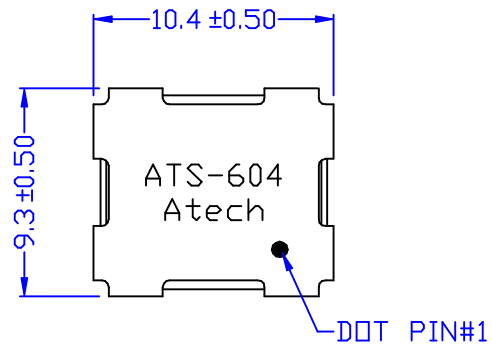

ELECTRICAL CHARACTERISTICS : <AP 1153 COMPATIBLE>

- DCR : PIN 3-1 = 1.25 Ω HM $\pm$ 12%
PIN 6-4 = 2.74 Ω HM $\pm$ 12%
- INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 3-1 = 500uH $\pm$ 10%
PIN 3-4 (1-6 SHORT) = 4.55mH $\pm$ 5%
- INTERWINDING CAP. (@100KHZ, 1Vrms) : PIN 3-4 = 3pF +0/-1pF
- LEAKAGE INDUCTANCE (@100KHZ, 1Vrms) :
PIN 1-3 (4-6 SHORT) = 40uH +0/-40uH
- TURN RATIO (@460KHZ, 1Vrms) : PIN 6-4 : PIN 3-1 = 2 $\pm$ 1%
- HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4, 1-CORE, 4-CORE

						Atech®		TITLE INDUCTOR FOR ISDN/POTS SPLITTER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:022794-6667 FAX:022794-8004		ATS-604	
RELEASE		03/27/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
NO. DESCRIPTION		DATE	BY	CHK	APPD	DATE		SHEET OF 1	
REVISIONS						03/27/02		DRAW Pair	