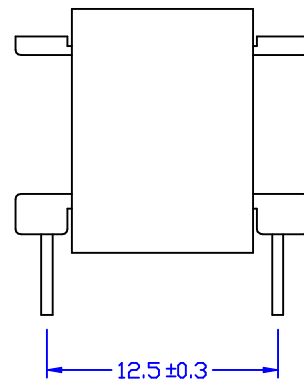
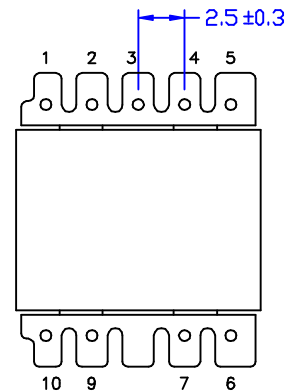
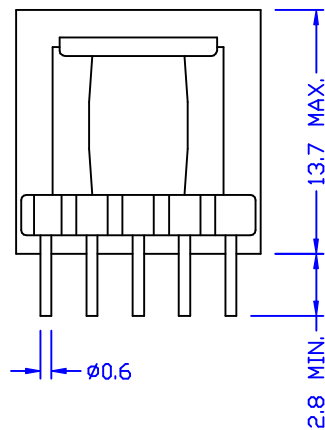
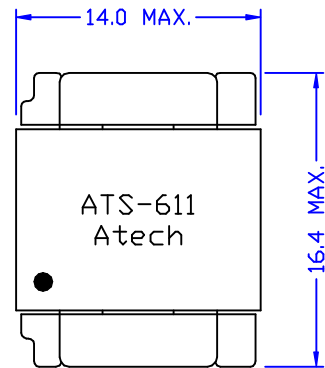


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-4 = 7-10 = 9.83 Ω HM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-10 (4-7 SHORT) = 52mH $\pm$ 5%
(@100mADC) : PIN 1-10 (4-7 SHORT) = 45.76mH MIN.
3. INDUCTANCE BAL. (@1KHZ, 1Vrms) : PIN 1-4 : PIN 7-10 = 1 $\pm$ 1%
4. TURN RATIO (@100KHZ, 1Vrms) : PIN 1-4 : PIN 7-10 = 1 $\pm$ 2%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-10

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE INDUCTOR FOR SPLITTER	
								DWG. NO. ATS-611	
	RELEASE	05/06/2002	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						05/06/02			