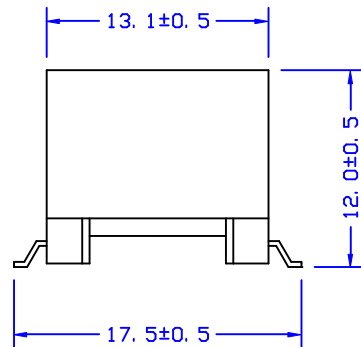
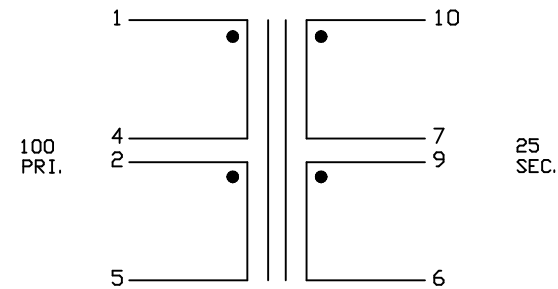



ELECTRICAL CHARACTERISTICS : <50819R COMPATIBLE>

- DCR : PIN 1-4 = 2-5 = 0.86 OHM +/-12%
PIN 10-7 = 9-6 = 0.22 OHM +/- 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 (<2-4 SHORT) = 409.5uH +/- 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (<2-4 7-9 10-6 SHORT) = 8uH +0/-8
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (<2-4 7-9 SHORT) = 35pF +/-10%
- TURN RATIO (@1MHZ, 1Vrms) :
PIN 1-5 (<2-4 SHORT) : PIN 10-6 (<7-9 SHORT) = 2 +/-10%
- HI-POT (@1500VAC, 1mA, 2SEC) : PIN 1-10 (<2-4 7-9 SHORT)

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE ADSL TRANSFORMER
								DWG. NO. ATS-612B
	RELEASE	03/19/2003	PAIR	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						03/19/03		