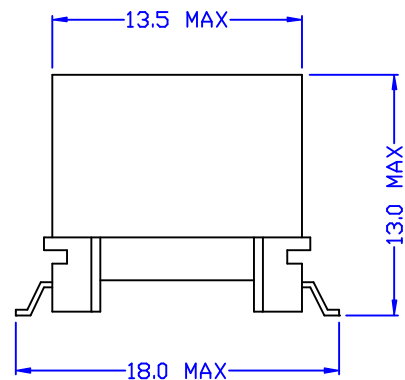
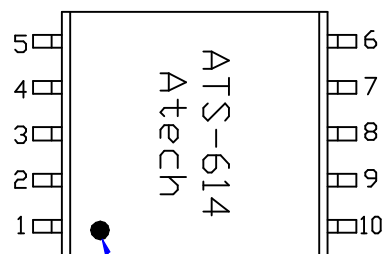


ELECTRICAL CHARACTERISTICS : <D010452 COMPATIBLE>

- DCR : PIN 1-4 = 1.77 OHM $\pm$ 12%
PIN 10-7 = 0.44 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 = 1.5mH $\pm$ 6%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 1-4 (W/H 10-7 SHORT) = 15uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) : PIN 1-10 = 35pF MAX.
- TURN RATIO (@560KHZ, 1Vrms) : PIN 1-4 : PIN 10-7 = 1.95 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 2SEC) : PIN 1-10

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-614	
	RELEASE	05/09/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 05/09/02			
REVISIONS								SHEET 1 OF 1	
								DRAW <i>Pair</i>	