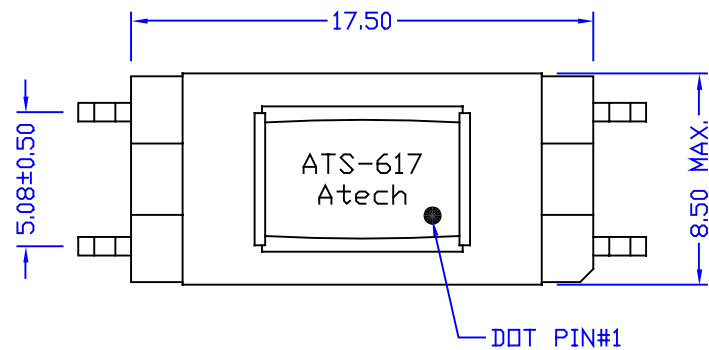


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 196 OHM $\pm$ 15%
PIN 3-4 = 175 OHM $\pm$ 15%
- INDUCTANCE PARALLEL (@1KHZ, 1Vrms) : PIN 1-2 = 0.98H MIN.
- INSERTION LOSS (@1KHZ, 0dBm, 3-4 W/H 287 OHM) : PIN 1-2 = 4.5dB MAX.
- FREQ. RESP. (@REF 1KHZ) : @200HZ = $\pm$ 0.5dB
@4KHZ = $\pm$ 0.5dB
- RETURN LOSS (@REF 600OHM) : @200HZ = 23dB MIN.
@1KHZ = 23dB MIN.
@4KHZ = 22dB MIN.
- TURN RATIO (@20KHZ, 1Vrms) : PIN 1-2 : PIN 4-3 = 1 $\pm$ 1%
- HI-PDT (@1500VAC, 1mA, 2SEC) : PIN 1-4

						Atech®		TITLE	600 : 287
B	21.50 MAX.	07/05/2004	BART	AL	SUEDY	Atech Technology Co., Ltd.		TRANSFORMER	
A	PITCH TOLERANCE	11/27/2002	DOLLY	SIMON	SUEDY	TEL:0282794-6667 FAX:0282794-8004		DWG. NO.	ATS-617
	RELEASE	06/27/2002	DOLLY	CPLIU	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	DRAW Pair
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	06/27/02		