

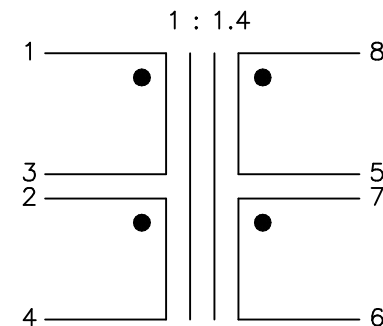
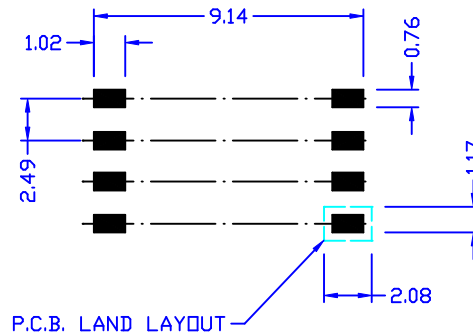
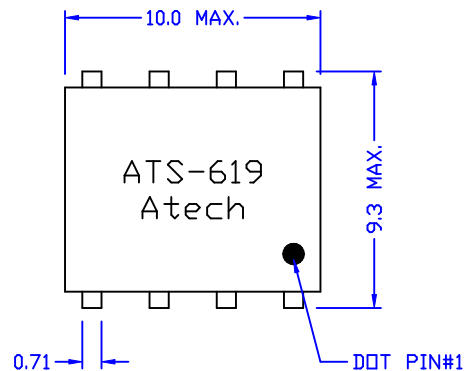


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 450 mΩHM ± 12%
PIN 8-5 = 2.15 ΩHM ± 12%
PIN 7-6 = 1.43 ΩHM ± 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 400uH ± 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 6-8 (2-3 5-7 1-4 SHORT) = 10uH MAX.
- INTERWINDING CAP. (@10KHZ, 1Vrms) :
PIN 1-8 (2-3 5-7 SHORT) = 70pF MAX.
- TURN RATIO (@120KHZ, 1Vrms) :
PIN 8-6 (5-7 SHORT) : PIN 1-4 (2-3 SHORT) = 1.4 ± 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-8 (2-3 5-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
A	ADD LAND LAYOUT	02/26/2003	PAIR	AL	AUEDY			DWG. NO. ATS-619	
	RELEASE	07/12/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						07/12/02		DRAW <i>Pair</i>	