

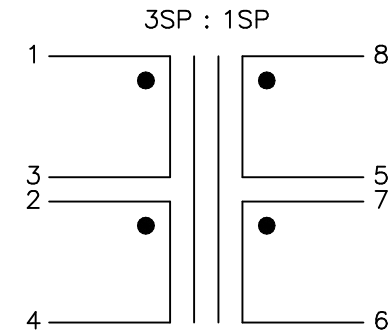
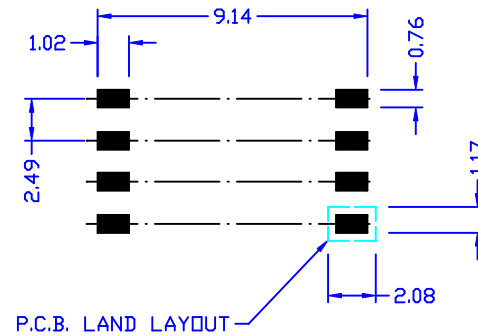
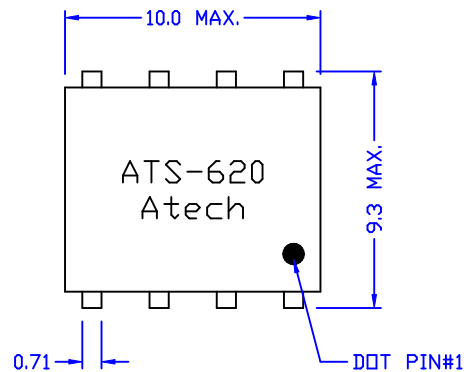


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 511 mΩHM ± 12%
PIN 8-5 = 7-6 = 506 mΩHM ± 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 1.2mH ± 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 6-8 (2-3 5-7 1-4 SHORT) = 4uH MAX.
- INTERWINDING CAP. (@10KHZ, 1Vrms) :
PIN 1-8 (2-3 5-7 SHORT) = 30pF MAX.
- TURN RATIO (@2KHZ, 1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 8-6 (5-7 SHORT) = 3 ± 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-8 (2-3 5-7 SHORT)

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
							DWG. NO. ATS-620	
A	ADD LAND LAYOUT	02/26/2003	PAIR	AL	AUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	07/12/2002	DOLLY	CPLIU	SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW <i>Pair</i>	
REVISIONS						07/12/02		