

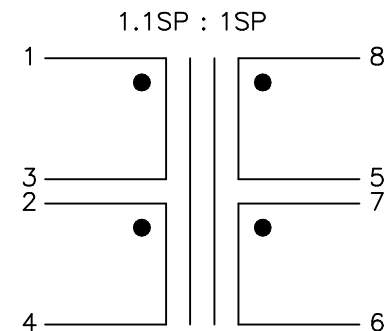
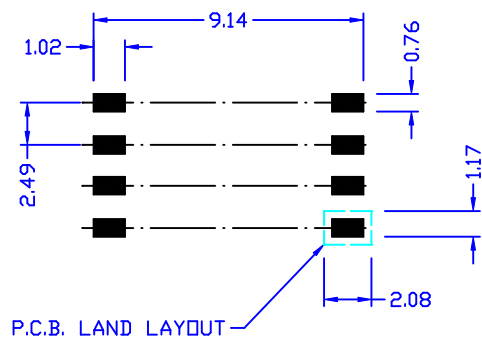
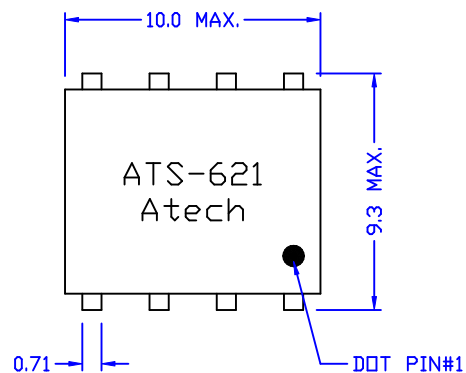


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 454 mΩHM ± 12%
PIN 8-5 = 545 mΩHM ± 12%
PIN 7-6 = 437 mΩHM ± 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 122uH ± 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 6-8 (2-3 5-7 1-4 SHORT) = 4uH MAX.
- INTERWINDING CAP. (@10KHZ, 1Vrms) :
PIN 1-8 (2-3 5-7 SHORT) = 65pF MAX.
- TURN RATIO (@200KHZ, 1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 8-6 (5-7 SHORT) = 1.1 ± 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-8 (2-3 5-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-621	
A	ADD LAND LAYOUT	02/26/2003	PAIR	AL	AUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	07/15/2002	DOLLY	CPLIU	SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW <i>Pair</i>	
REVISIONS						07/15/02		