
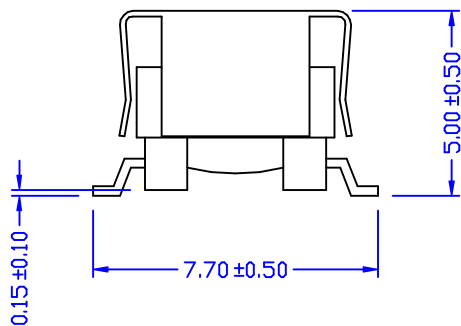
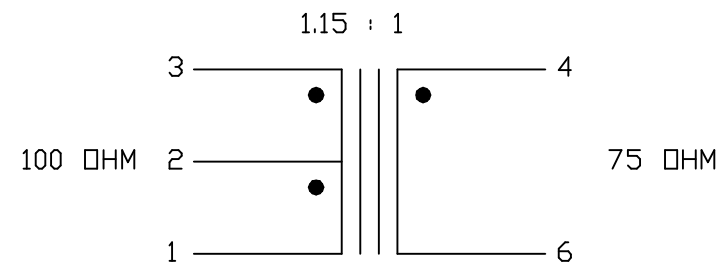
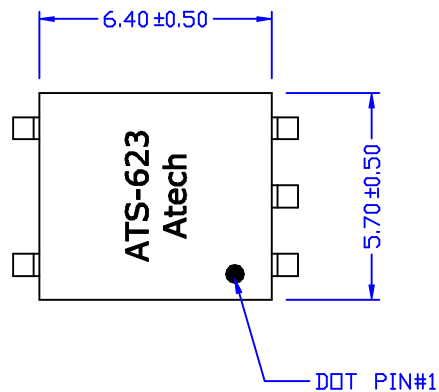


ELECTRICAL CHARACTERISTICS : (50479R COMPATIBLE)

- DCR : PIN 3-2 = 1.37 ΩHM MAX.
PIN 2-1 = 1.61 ΩHM MAX.
PIN 4-6 = 2.6 ΩHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 3-1 = 2.2mH MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 3-1 (4-6 SHORT) : 3.2uH MAX.
- TURN RATIO (@20KHZ, 0.1Vrms) : PIN 3-1 :
PIN 4-6 = 1.1375 ± 1%
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) : PIN 3-4 = 50pF TYP.
- HI-PDT (@1.25KVAC, 1mA, 2SEC) : PIN 3-4

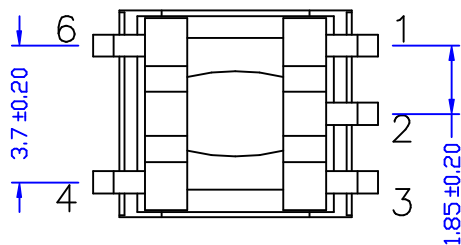

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-623	
	RELEASE	07/09/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						07/09/02			
								DRAW <i>Pair</i>	