
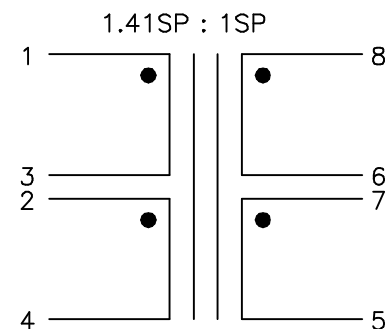
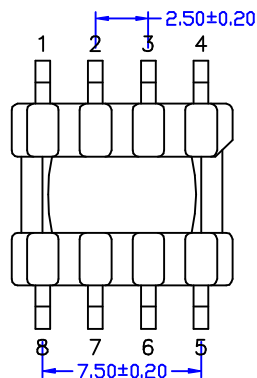




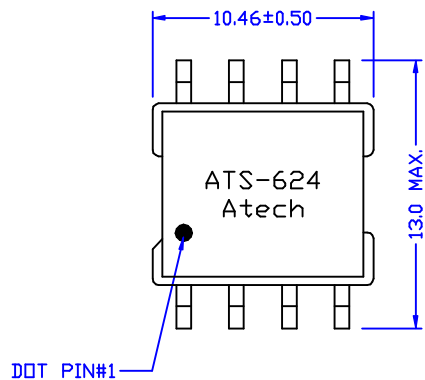

ELECTRICAL CHARACTERISTICS : <AP 1386 COMPATIBLE>

- DCR : PIN 1-3 = 2-4 = $956 \text{ m}\Omega \pm 12\%$
PIN 7-5 = 8-6 = $690 \text{ m}\Omega \pm 12\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = $410\mu\text{H} \pm 6\%$
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3 6-7 8-5 SHORT) = $10\mu\text{H} +0/-10\mu\text{H}$
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-8 (2-3 6-7 SHORT) = $20\text{pF} \pm 15\text{pF}$
- TURN RATIO (@6.5KHZ, 1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 8-5 (6-7 SHORT) = $1.41 \pm 1\%$
- HI-POT (@2.5KVDC, 1mA, 1SEC) : PIN 1-8 (2-3 6-7 SHORT)

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE TRANSFORMER		
B	BOBBIN斜角	09/13/2002	DOLLY	HC		SUEDY	DWG. NO. ATS-624	
A	ELECTRICAL CHARACTERISTICS	09/02/2002	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	07/22/2002	DOLLY	CPLIU	SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW	Pair
REVISIONS						07/22/02		