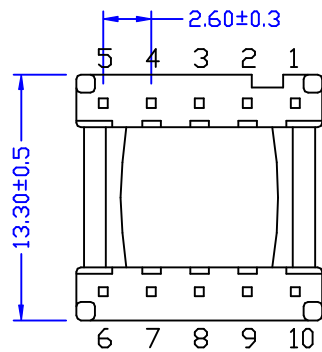
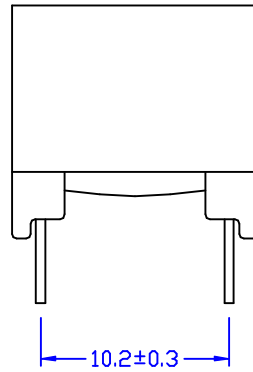
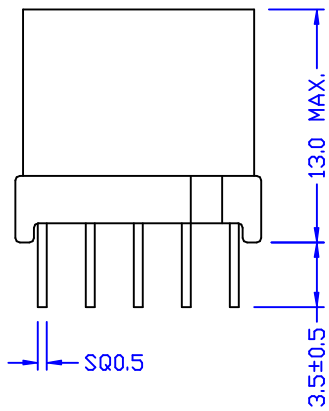
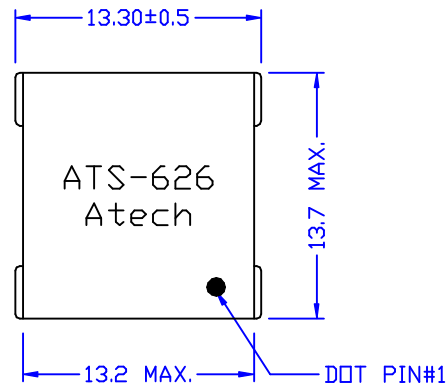


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-5 = 6-10 = 12 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-10 (5-6 SHORT) = 20mH $\pm$ 5%
(@100mA) : PIN 1-10 (5-6 SHORT) = 18mH MIN.
3. TURN RATIO (@20KHZ, 1Vrms) : PIN 1-5 : PIN 6-10 = 1 $\pm$ 2%
4. HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE POTS FILTER INDUCTOR	
								DWG. NO. ATS-626	
	RELEASE	08/15/2002	DOLLY	JEFF	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/15/02			DRAW <i>Pair</i>
REVISIONS									