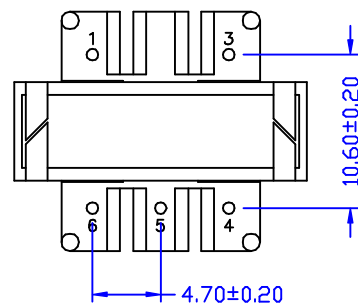
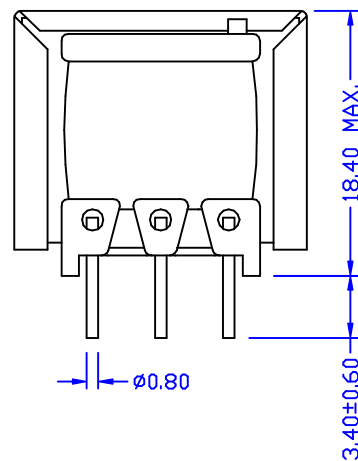
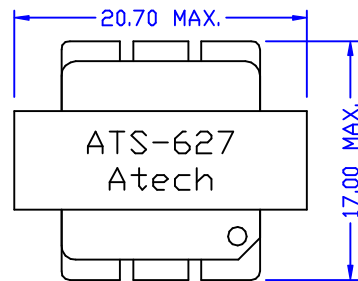


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 68.8 Ω HM $\pm$ 12%
PIN 4-6 = 207 Ω HM $\pm$ 12%
2. INDUCTANCE PARALLEL (@300HZ, 1Vrms) : PIN 1-3 = 200mH MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 90mADC 4-6 W/H 1200 Ω HM) : PIN 1-3 = 600 Ω HM $\pm$ 10%
4. INSERTION LOSS (@1KHZ, 0dBm, 90mADC, 4-6 W/H 1200 Ω HM) : 2.3dB MAX.
5. FREQ RESP. (@REF 1KHZ) : (@300HZ) = $\pm$ 3dB
(@4KHZ) = $\pm$ 1dB
6. RETURN LOSS (@REF 600 Ω HM) : (@300HZ) = 5dB MIN.
(@1KHZ) = 10dB MIN.
(@4KHZ) = 12dB MIN.
7. TURN RATIO (@5KHZ, 1Vrms) : PIN 1-3 : PIN 4-6 = 0.707 $\pm$ 1%
8. HI-POT (@1500VAC, 1mA, 1MIN) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE 600 : 1200CT TRANSFORMER	
							DWG. NO. ATS-627	
	RELEASE	09/24/2002	DOLLY	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						09/24/02		