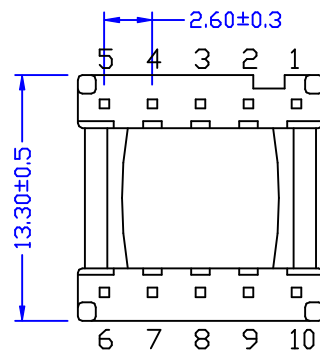
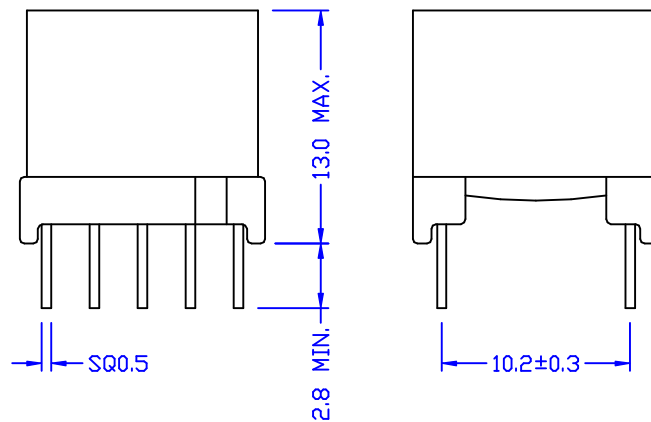
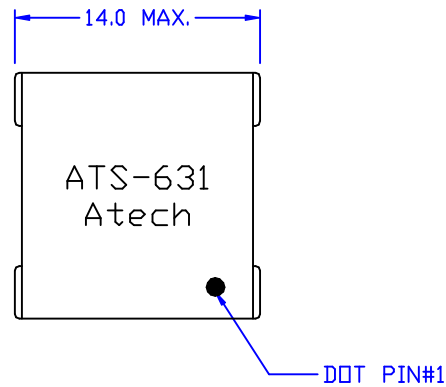


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 2-5 = 2 OHM $\pm$ 10%
PIN 10-6 = 2.2 OHM $\pm$ 10%
PIN 9-7 = 1.76 OHM $\pm$ 10%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 (W/H 2-4 SHORT) = 2.79mH $\pm$ 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (W/H 2-4 6-9 7-10 SHORT) = 18uH MAX.
- IMPEDANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 (10-7 W/H 69.4 OHM 2-4 6-9 SHORT) = 70 OHM $\pm$ 10%
- TURN RATIO (@180KHZ, 1Vrms) :
PIN 1-5 (2-4 SHORT) : PIN 10-7 (6-9 SHORT) = 1 $\pm$ 1%
- HI-POT (@1500VAC, 1mA, 2SEC) : PRI-SEC

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:028794-6667 FAX:028794-8004		DWG. NO.
								ATS-631
	RELEASE	11/19/2002	DOLLY	KEVIN	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
						DATE		
REVISIONS						11/19/02	DRAW	